
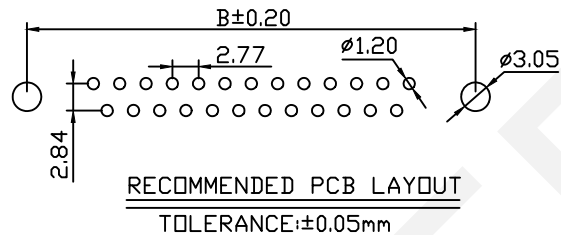
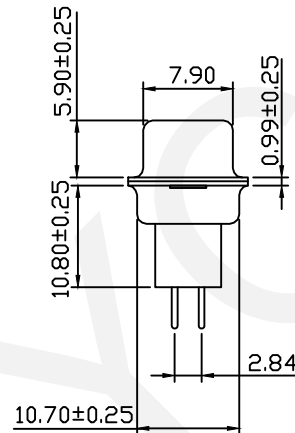
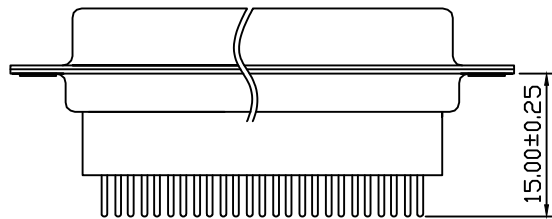


RoHS Compliant

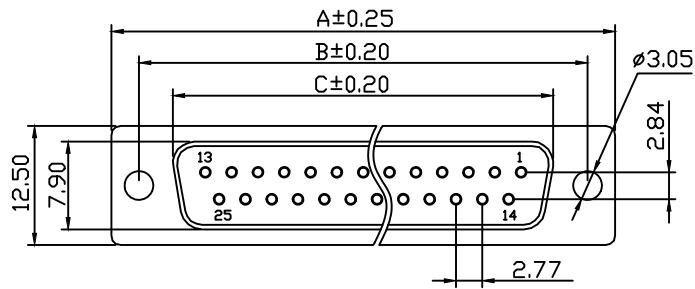

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Arer,

Tin On Solder Tail.

Shell:Steel,Nickel Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY71-XX-F-B

D-SUB Connector, _____

2 Row Through Hole _____

XX-No.of 09,15,25,37 Pins _____

Connector Type:F-Female, _____

Housing Color: _____

B-Black L-Blue W-White





Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.81	24.99	16.33
15	39.14	33.32	24.66
25	53.04	47.04	38.38
37	69.32	63.50	54.84

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
NINGBO ERYCO ELECTRONIC CO.,LTD		CHK'D BY FENG	APPR BY ZHAN

D-SUB Connector, High Profile,Through Hole,Female	
THIRD ANGLE PROJECTION	ERYAY71-XX-F-B



RoHS Compliant

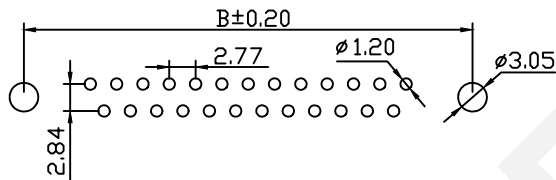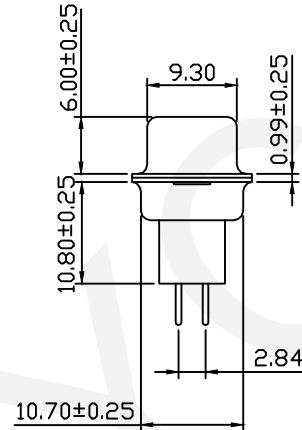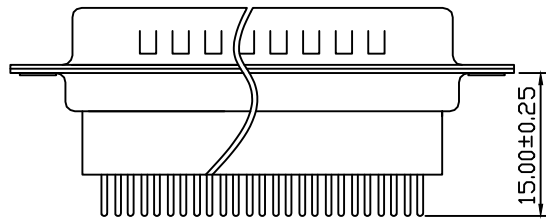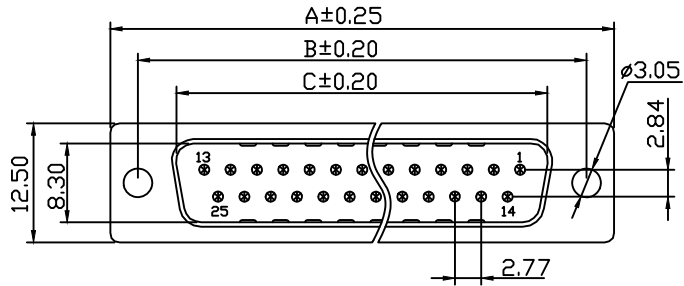

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.81	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.42

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell:Steel,Nickel Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY71-XX-M-B

D-SUB Connector, _____

2 Row Through Hole _____

XX-No.of 09,15,25,37 Pins _____

Connector Type: M-Male, _____

Housing Color: _____

B-Black L-Blue W-White

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	





D-SUB Connector, High Profile,Through Hole, Male

THIRD ANGLE PROJECTION



ERYAY71-XX-M-B

RoHS Compliant

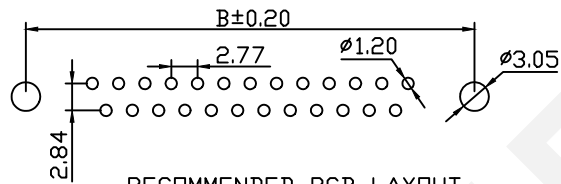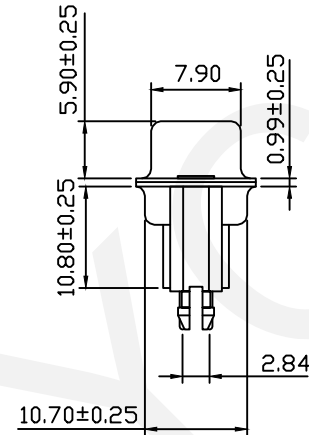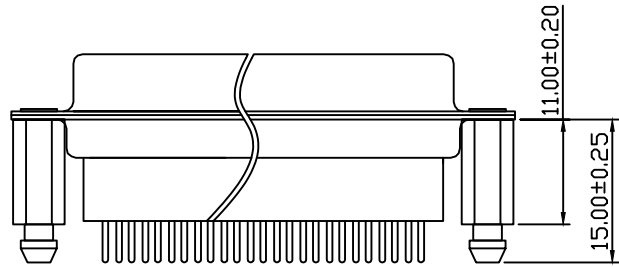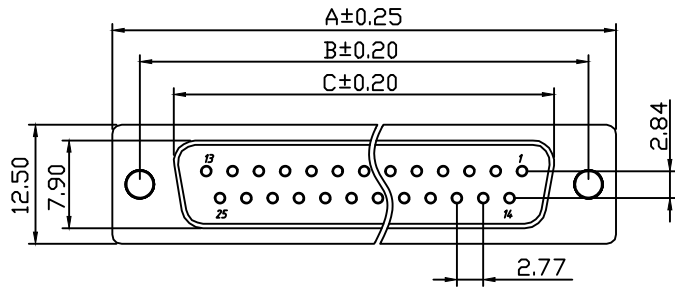

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.81	24.99	16.33
15	39.14	33.32	24.66
25	53.04	47.04	38.38
37	69.32	63.50	54.84

Material:
Housing:PBT+30% Glass Filled,UL94V-0
Contacts:Brass,Gold Plating Or
Gold Plating On Contact Area,
Tin On Solder Tail.
Shell:Steel,Nickel Plating

Electrical Characteristics:
Current Rating: 5 AMP
Insulator Resistance:1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) For 1 Minute
Contact Resistance:20MΩ Max. Initial
Operating Temperature:-40°C~+105°C


Order Information:

ERYAY71B-XX-F-B





D-SUB Connector, _____
2 Row Through Hole,After
Lock Screw Rivet Harpoons
XX-No.of 09,15,25,37 Pins _____
Connector Type:F-Female, _____
Housing Color: _____
B-Black L-Blue W-White

NINGBO ERYCO ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
	0~3	3~18	18~50	50~120
	±0.12	±0.15	±0.3	±0.5

D-SUB Connector,High Profile,Through Hole,Female,Riveting Later Harpoons	
THIRD ANGLE PROJECTION	ERYAY71B-XX-F-B



RoHS Compliant

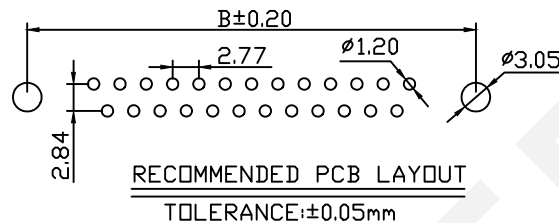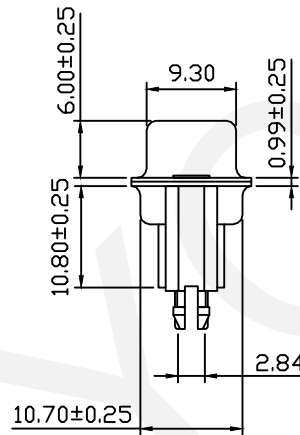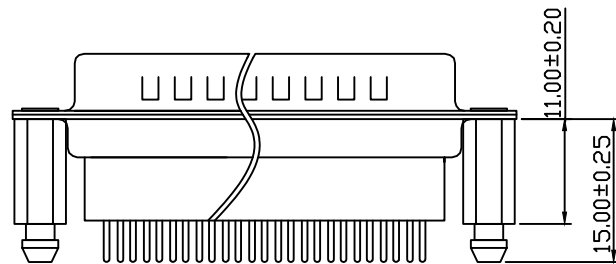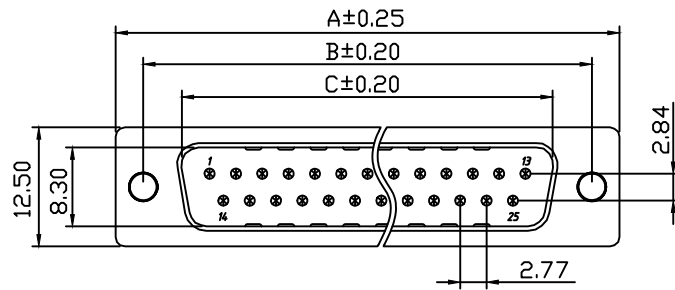

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.81	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.42

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass, Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel, Nickel Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -40°C ~ +105°C

Order Information:

ERYAY71B-XX-M-B

D-SUB Connector, _____

2 Row Through Hole, After

Lock Screw Rivet Harpoons

XX-No. of 09, 15, 25, 37 Pins _____

Connector Type: M-Male, _____

Housing Color: _____

B-Black L-Blue W-White

NINGBO ERYCO ELECTRONIC CO., LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

D-SUB Connector, High Profile, Through Hole, Male, Riveting Later Harpoons

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3





±0.5

APPR BY ZHAN



ERYAY71B-XX-M-B

RoHS Compliant

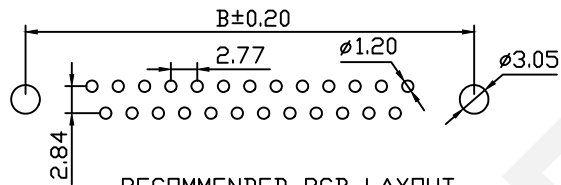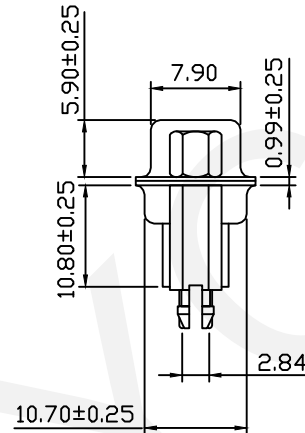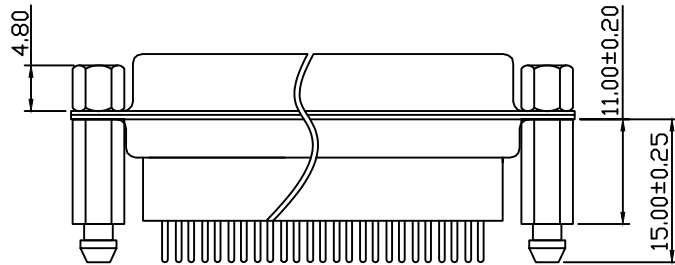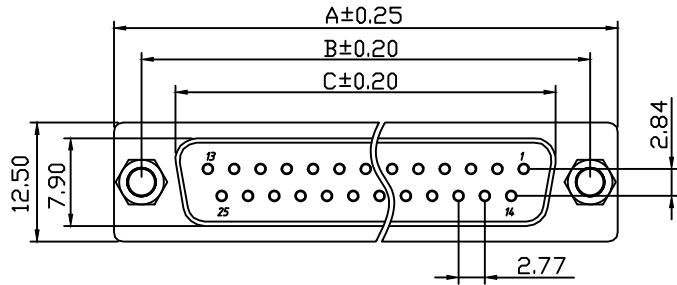

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.81	24.99	16.33
15	39.14	33.32	24.66
25	53.04	47.04	38.38
37	69.32	63.50	54.84

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell:Steel,Nickel Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY71C-XX-F-B

D-SUB Connector, _____

2 Row Through Hole,After

Lock Screw Rivet Harpoons

XX-No.of 09,15,25,37 Pins _____

Connector Type:F-Female, _____

Housing Color: _____

B-Black L-Blue W-White


NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN





D-SUB Connector,High Profile,Through Hole,Female,
Riveting Later Harpoons After Lock Screw Rivet Harpoons

THIRD ANGLE PROJECTION



ERYAY71C-XX-F-B

RoHS Compliant

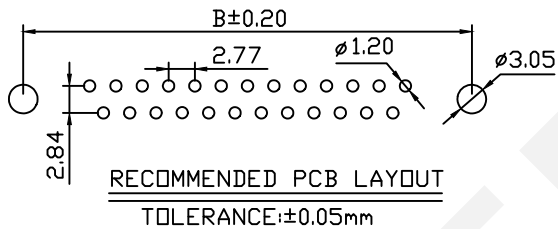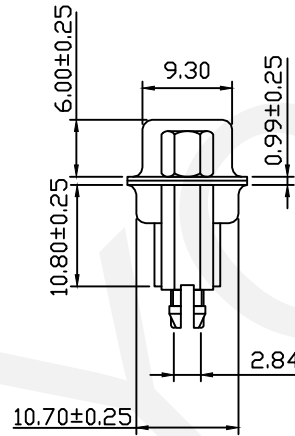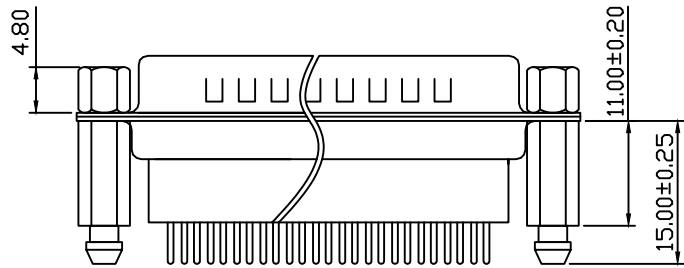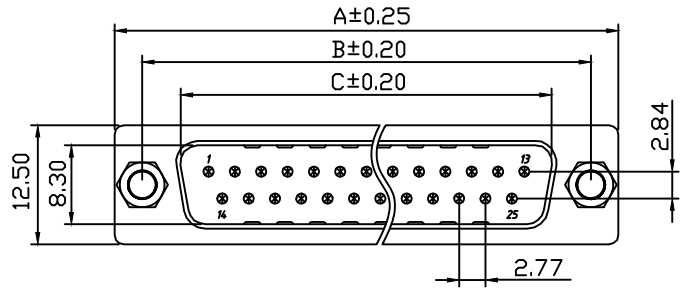

Number of Contacts	DIMENSION		
	A±0.25	B±0.20	C±0.20
09	30.81	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.42

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating Or

Gold Plating On Contact Arer,

Tin On Solder Tail.

Shell:Steel,Nickel Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY71C-XX-M-B

D-SUB Connector, _____

2 Row Through Hole,After

Lock Screw Rivet Harpoons

XX-No.of 09,15,25,37 Pins _____

Connector Type: M-Male, _____


Housing Color: _____

B-Black L-Blue W-White

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
NINGBO ERYCO ELECTRONIC CO.,LTD		CHK'D BY FENG	APPR BY ZHAN

D-SUB Connector,High Profile,Through Hole,Male,
Riveting Later Harpoons After Lock Screw Rivet Harpoons

THIRD ANGLE PROJECTION



ERYAY71C-XX-M-B