




RoHS Compliance

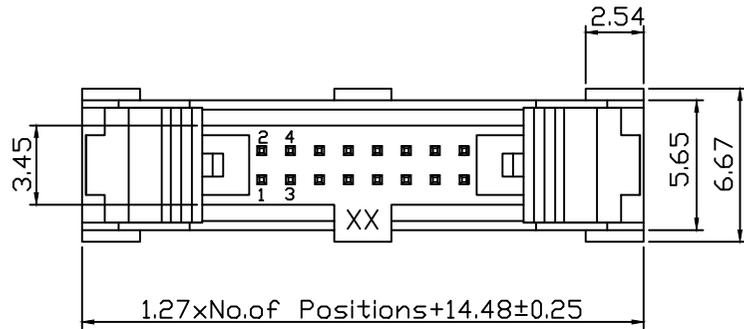

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

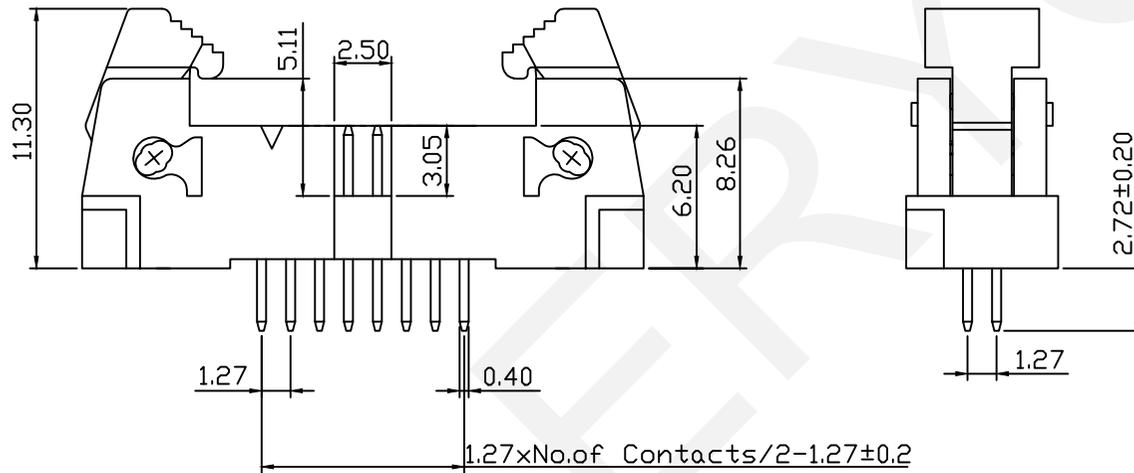

Material:

Housing:LCP+30%G.F UL94V-0,Color:Black
Contact:Brass,1u" MIN Gold Plating Over All
30u" MIN Nickel Underplating Over All

Electrical Characteristics:

Rated Current: 1.0AMP
Contact Resistance: 20MΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C
Max.Processing Temp:230°C For 30-60
Seconds (260°C For 10 Seconds)

Order Information:

ERYAY01CA-XX-S-B-C
Box Header Series
01CA: 1.27mm Pitch
XX-No.of 06~64 Pin
Type:S-Straight Pin
R-Right Angle Pin T-SMT
Color:B-Black G-Gray
Material:
B=PA6T C=LCP D=PA9T

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	



1.27mm Pitch Box Header Connector

THIRD ANGLE PROJECTION





ERYAY01CA-XX-S-B-C

RoHS Compliance

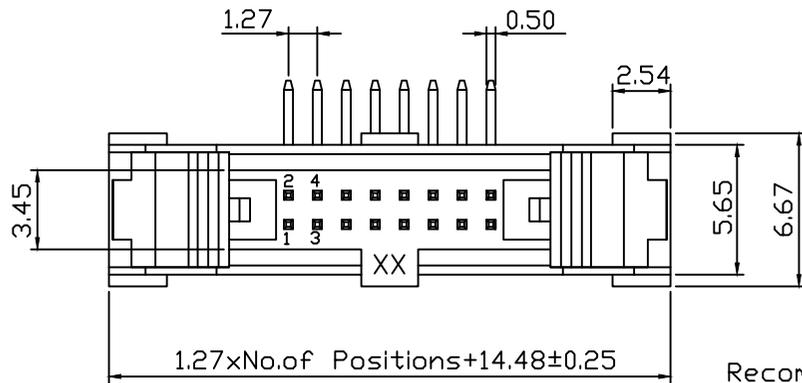

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

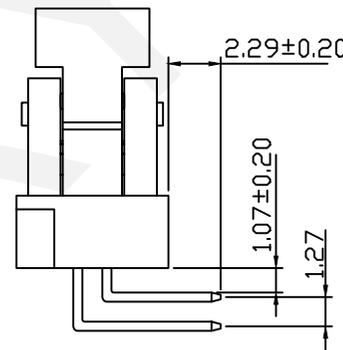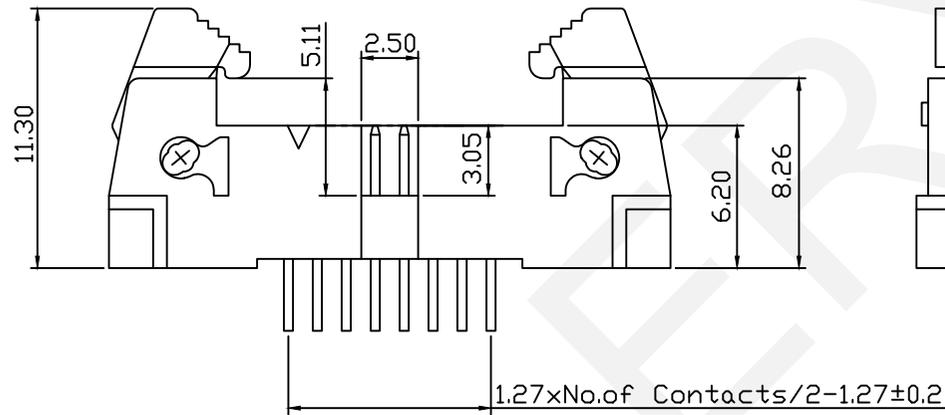

Material:

Housing:LCP+30%G.F UL94V-0,Color:Black
Contact:Brass,1u" MIN Gold Plating Over All
30u" MIN Nickel Underplating Over All

Electrical Characteristics:

Rated Current: 1.0AMP
Contact Resistance: 20MΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C
Max.Processing Temp:230°C For 30-60
Seconds (260°C For 10 Seconds)

Order Information:

ERYAY01CA-XX-R-B-C
Box Header Series
01CA: 1.27mm Pitch
XX-No.of 06~64 Pin
Type:S-Straight Pin
R-Right Angle Pin T-SMT
Color:B-Black G-Gray
Material:
B=PA6T C=LCP D=PA9T

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	


1.27mm Pitch Box Header Connector

THIRD ANGLE PROJECTION




ERYAY01CA-XX-R-B-C

RoHS Compliance

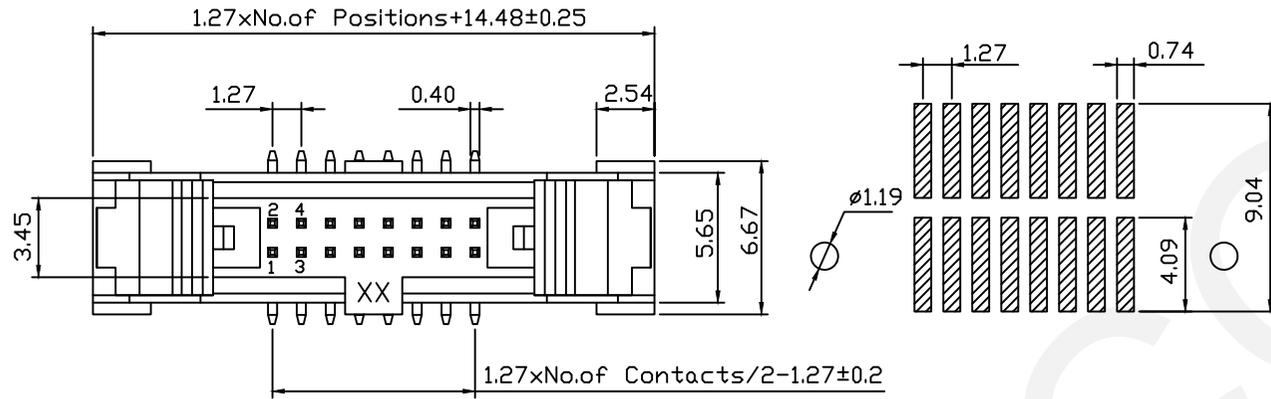

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

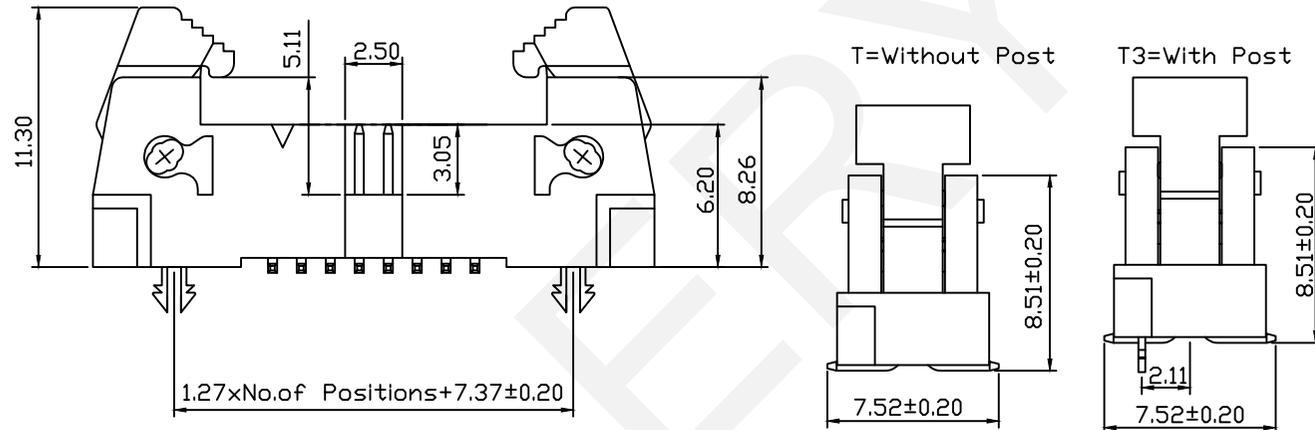

Material:
Housing:LCP+30%G.F UL94V-0,Color:Black
Contact:Brass,1u" MIN Gold Plating Over All
30u" MIN Nickel Underplating Over Al

Electrical Characteristics:
Rated Current: 1.0AMP
Contact Resistance: 20MΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min

Mechanical
Operating Temperature:-40°C~+105°C
Max.Processing Temp:230°C For 30-60
Seconds (260°C For 10 Seconds)

Order Information:
ERYAY01CA - XX-T-B-C T
Box Header Series
01CA: 1.27mm Pitch
XX-No.of 06~64 Pin
SMT:T=Without Post
T3=With Post
Color:B-Black G-Gray
Material:
B=PA6T C=LCP D=PA9T
Packing:
T=Tube P= Tube+Cap R=Reel+Cap

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

1.27mm Pitch Box Header Connector
THIRD ANGLE PROJECTION
ERYAY01CA-XX-T-B-C-T