


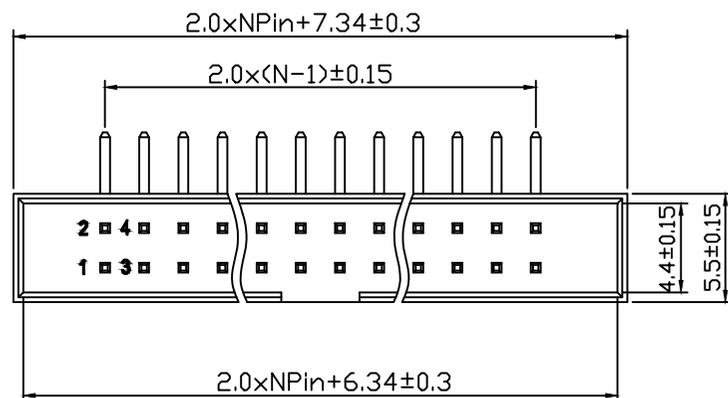


RoHS Compliance

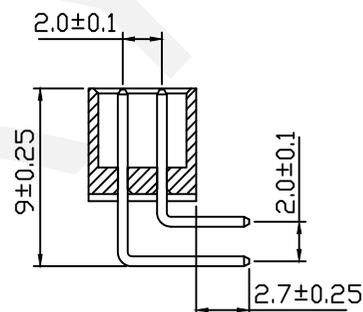

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

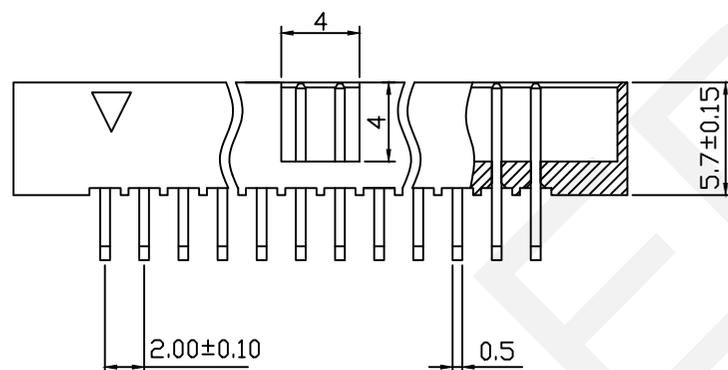

Material:

Housing: PA6T, UL94V-0

Contact: Brass

Plating: Gold Plated

Electrical Characteristics:

Rated Current: 1.5AMP

Contact Resistance: 20MΩ Max

Withstand Voltage: 400V AC/DC

Insulator Resistance: 800MΩ Min

Mechanical

Operating Temperature:-40°C~+105°C

Max.Processing Temp:230°C For 30-60

Seconds (260°C For 10 Seconds)

Order Information:

ERYAY02B-XX-R-B-□

Box Header Series

02B: 2.00mm Pitch

XX-No.of 06~64 pins

Type:S-Straight pin

R-Right Angle Pin T-SMT

Color:B-Black G-Gray

Material:NONE=PA6T

A=PBT C=LCP

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.00mm Pitch Box Header Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



ERYAY02B-XX-R-B-□

±0.12


±0.15

±0.3


±0.5

APPR BY ZHAN

RoHS Compliance

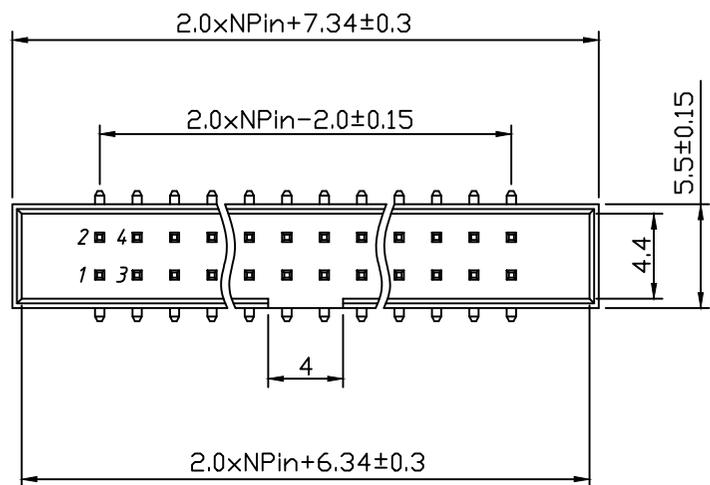

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

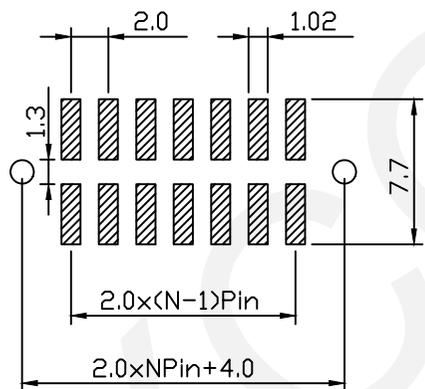

Material:
Housing: PA6T, UL94V-0
Contact: Brass
Plating: Gold Plated



Electrical Characteristics:
Rated Current: 1.5AMP
Contact Resistance: 20MΩ Max
Withstand Voltage: 400V AC/DC
Insulator Resistance: 800MΩ Min

Mechanical
Operating Temperature: -40°C~+105°C
Max.Processing Temp: 230°C For 30-60 Seconds (260°C For 10 Seconds)

Order Information:

ERYAY02B-XX-T-B-□-T

Box Header Series
02B: 2.00mm Pitch
XX-No.of 06~64 pins
SMT:T=Without Post
T3=With Post
Color:B-Black G-Gray
Material:NONE=PA6T
A=PBT C=LCP
Packing:
T=Tube P=Tube+Cap R=Reel+Cap

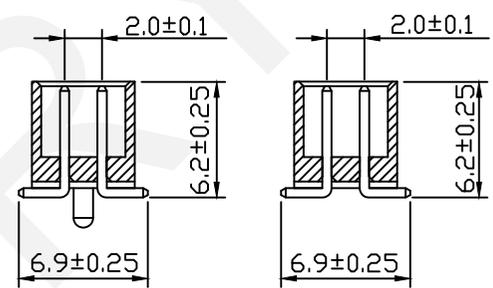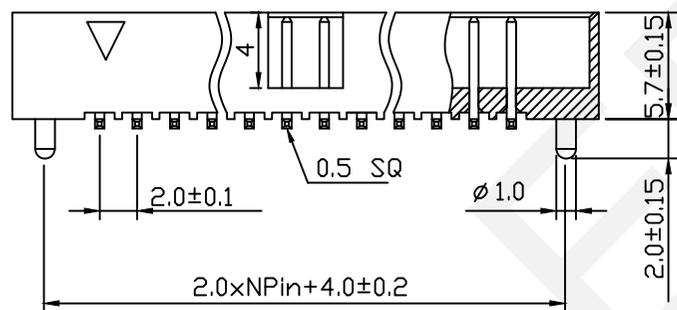

T3=With Post T=Without Post

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.00mm Pitch Box Header Connector
THIRD ANGLE PROJECTION
ERYAY02B-XX-T-B-□-T