
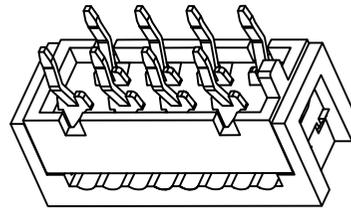


RoHS Compliance

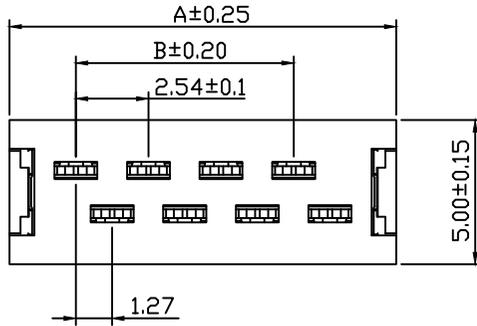

Material:

Housing: PBT, Glass Fiber, UL94V-0

Contacts: Phosphor Bronze

Plating: Sn Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP



Contact Resistance: 20MΩ ohm Max

Insulator Resistance: 1000MΩ ohm Min

Withstand Voltage: 500V AC

Operating Temperature: -40°C ~ +105°C

Poles	DIM.A	DIM.B	Qty/Tube
04	8.45	2.54	68
06	10.99	5.08	52
08	13.53	7.62	42
10	16.07	10.16	36
12	18.61	12.70	31
14	21.15	15.24	27
16	23.69	17.78	24
18	26.23	20.32	22
20	28.77	22.86	20
22	31.31	25.40	18
24	33.85	27.94	17
26	36.39	30.48	16

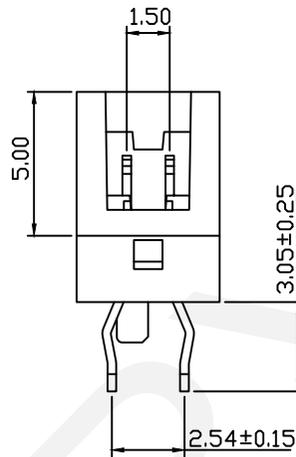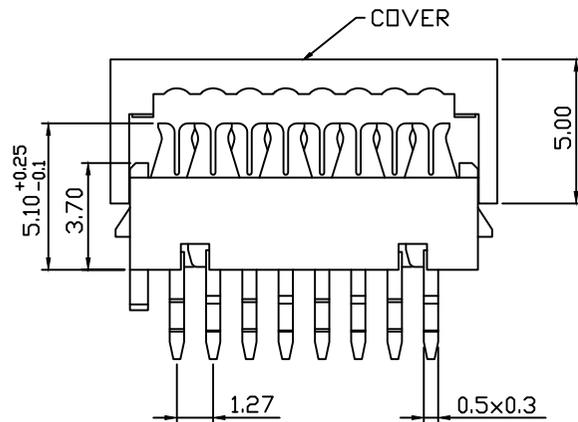

Order Information:

ERYAY04A-XX-R-□


Pitch: 2.54mm

XX-No. of 04~26pin


Color: R-Red B-Black

Material:

NONE=PBT E=PA46

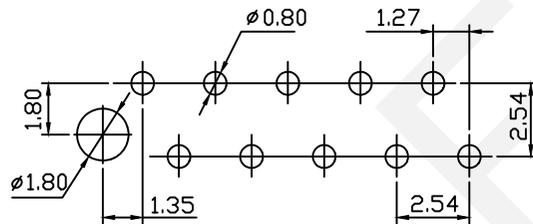

Recommended P.C.B Layout



NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Micro Match Dip Plug Connector

THIRD ANGLE PROJECTION



ERYAY04A-XX-R-□