


RoHS Compliance

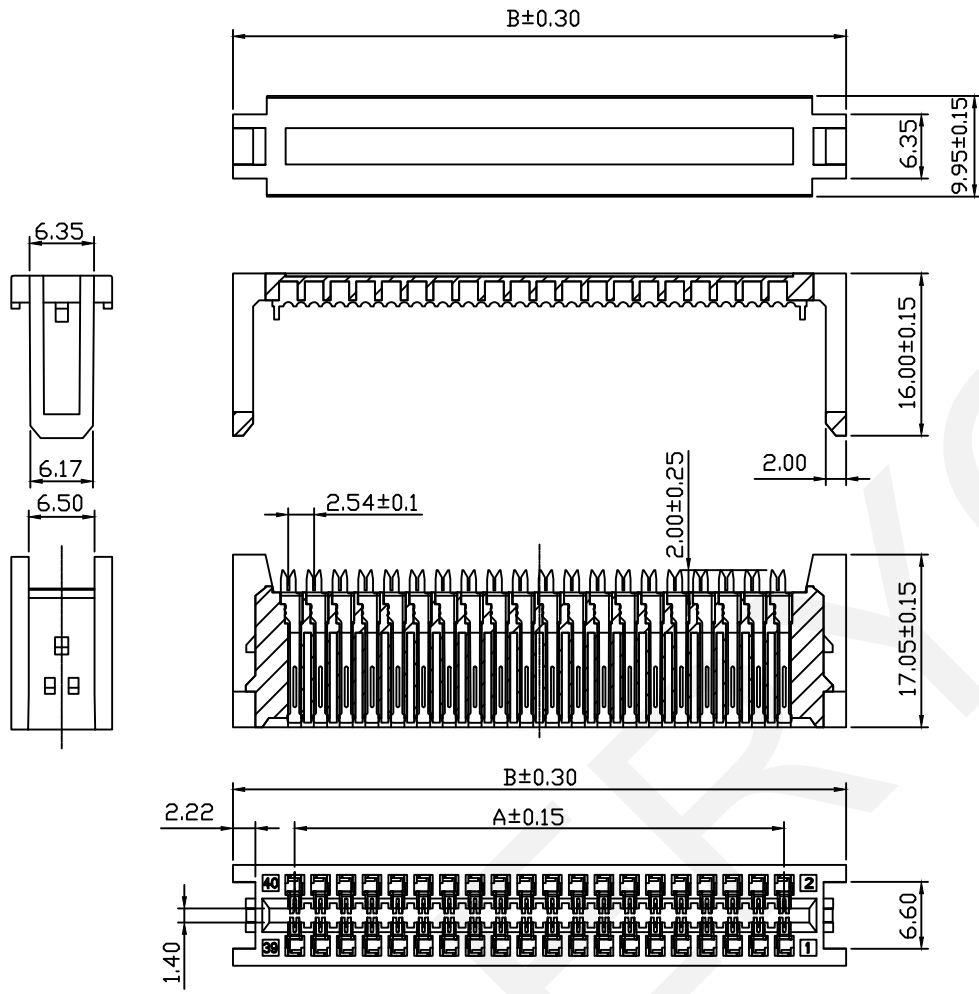

Material:
Housing: 30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Au Or Sn Over 50u" Nickel

Electrical Characteristics:
Current Rating : 3.0AMP
Voltage Rating : 250V AC,DC
Withstand Voltage: 500V AC
Insulator Resistance: 1000MΩ ohm Min
Contact Resistance: 20MΩ ohm Max
Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Max. Processing Temp: 180°C For 30-60 Seconds (200°C For 10 Seconds)

Order Information:
ERYAY04CE-XX
IDC Connectors
2.54mm Pitch
XX-No. of 10~64pin

Pin	Dimension mm	
	A	B
10	10.16	22.36
14	15.24	27.44
16	17.78	29.98
20	22.86	35.06
26	30.48	42.68
34	40.64	52.84
40	48.26	60.46

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
± 0.12	± 0.15	± 0.3	± 0.5

CHK'D BY FENG
APPR BY ZHAN

2.54mm Pitch EDGE Card IDC Connector

THIRD ANGLE PROJECTION



ERYAY04CE-XX