
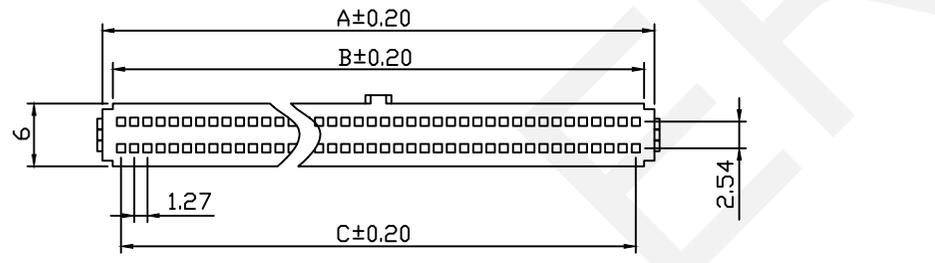
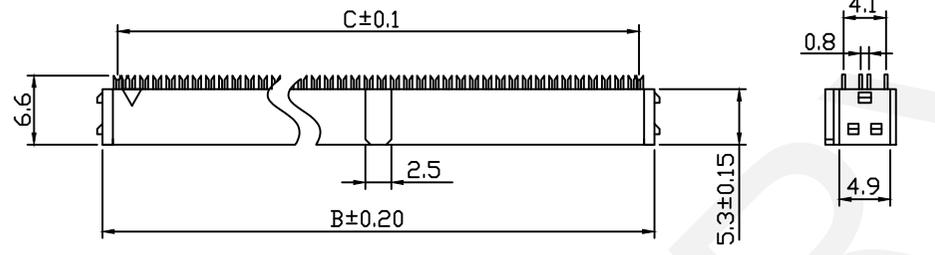
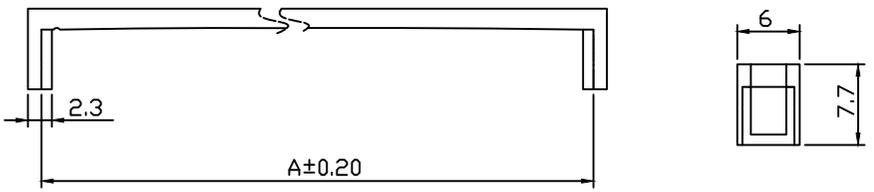


RoHS Compliance

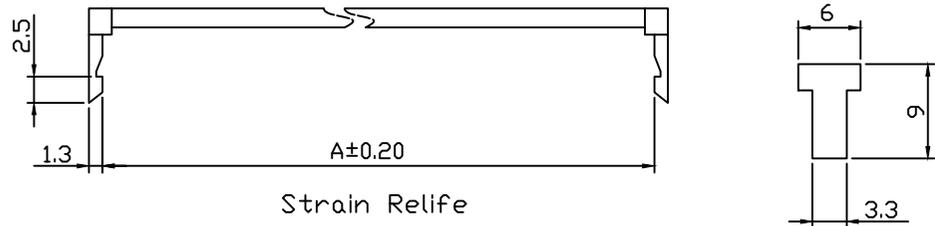

Material:
 Housing: PBT,UL94V-0
 Contacts: Phosphor Bronze
 Plating: Au Or Sn 50u" Over Ni

Pin	Dimension mm		
	A	B	C
10	11.25	8.35	5.08
14	13.79	10.89	7.62
16	15.06	12.16	8.89
20	17.60	14.70	11.43
22	18.87	15.97	12.70
26	21.41	18.51	15.24
30	23.95	21.05	17.78
34	26.49	23.59	20.32
40	30.30	27.40	24.13
44	32.84	29.94	26.67
50	36.65	33.75	30.48
60	43.00	40.10	36.83
68	48.08	45.18	41.91
80	55.70	52.50	49.53
100	68.40	65.50	62.23


Electrical Characteristics:
 Current Rating : 1.0AMP
 Withstand Voltage: 500V AC
 Insulator Resistance: 1000MΩ ohm Min
 Contact Resistance: 30MΩ ohm Max
 Operating Temperature:-40°C~+105°C
 Max.Processing Temp:180°C For 30-60
 Seconds (200°C For 10 Seconds)

Order Information:
 ERYAY04D-XX-B

IDC Connectors
 1.27x2.54mm Pitch
 XX-No.of 10~100pin
 Color:
 B-Black G-Gray L-Blue

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	1.27x2.54mm Pitch IDC Socket Connector	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	RHTAY04D-XX-B



RHTAY04D-XX-B