



RoHS Compliance

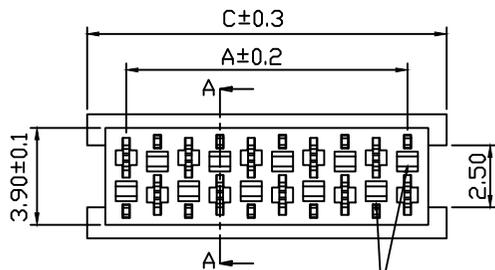

REFERENCE MATING INTERFACE PATTERN:
1.27 STAGGERED PITCHx15 ROW-DISTANCE

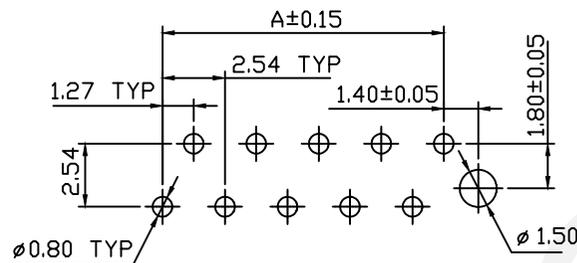

Recommended P.C.B Layout

Material:

Housing: PBT,Glass Fiber,UL94V-0

Contacts: Phosphor Bronze

Plating: Sn Over Ni

Electrical Characteristics:




Current Rating : 1.0AMP

Contact Resistance: 20MΩ ohm Max

Insulator Resistance: 1000MΩ ohm Min

Withstand Voltage: 500V AC

Operating Temperature:-40°C~+105°C

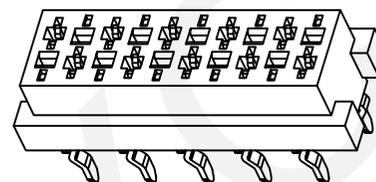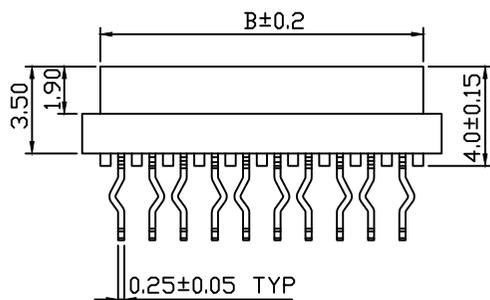

Order Information:

ERYAY04FV-XX-R-□


Pitch:2.54mm

XX-No.of 04~26pin


Color:R-Red B-Black

Material:

A=PBT D=PA9T E=PA46

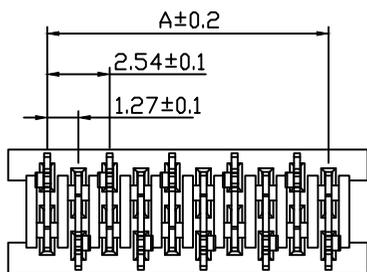

SECTION A-A



Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	3.81	5.50	6.99	82
06	6.35	8.04	9.53	60
08	8.89	10.58	12.07	48
10	11.43	13.12	14.61	39
12	13.97	15.66	17.15	33
14	16.51	18.20	19.69	29
16	19.05	20.74	22.23	26
18	21.59	23.28	24.77	23
20	24.13	25.82	27.31	21
22	26.67	28.36	29.85	19
24	29.21	30.90	32.39	17
26	31.75	33.44	34.93	16

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

Micro Match Connector Male SMD Type

THIRD ANGLE PROJECTION



ERYAY04FV-XX-R-□