

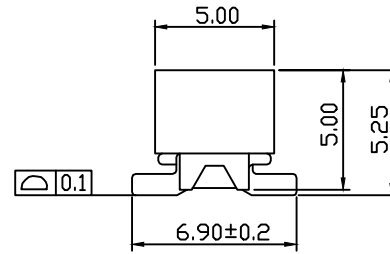
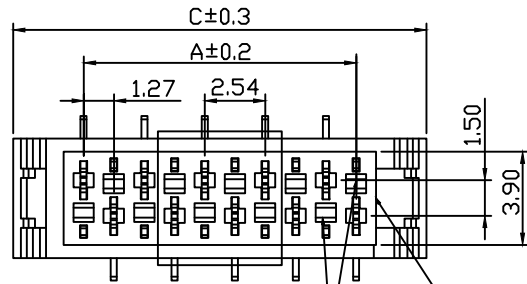
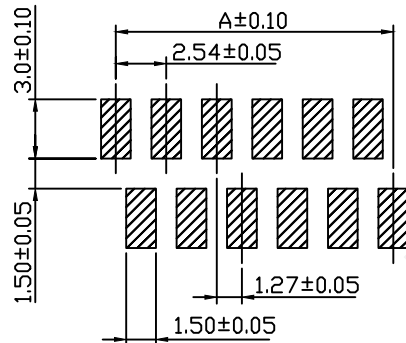


RoHS Compliance

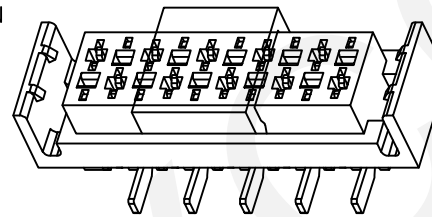

REFERENCE MATING INTERFACE PATTERN:
1.27 STAGGERED PITCH×15 ROW-DISTANCE

POLARISATION
SOLT

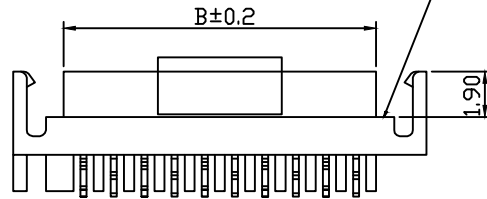

Recommended P.C.B Layout

Material:

Housing: PA46/PA9T UL94V-0

Contacts: Phosphor Bronze

Plating: Sn Over 50u" Nickel

Electrical Characteristics:

Current Rating : 1.0AMP

Voltage Rating: 230V AC/DC

Withstand Voltage: 500V AC/Minute

Contact Resistance: 20MΩ ohm Max

Insulator Resistance: 1000MΩ ohm Min

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY04GE-XX-R-□-□

Pitch:2.54mm

XX-No.of 04~26pin

Color:R-Red B-Black

Material: _____

NONE=PA9T E=PA46

Packing: _____

TC=Cap+Tube C-R=Cap+Reel

| Poles | DIM.A | DIM.B | DIM.C | Qty/Tube |
|-------|-------|-------|-------|----------|
| 04 | 3.81 | 5.50 | 9.71 | 59 |
| 06 | 6.35 | 8.04 | 12.25 | 47 |
| 08 | 8.89 | 10.58 | 14.79 | 39 |
| 10 | 11.43 | 13.12 | 17.33 | 33 |
| 12 | 13.97 | 15.66 | 19.87 | 29 |
| 14 | 16.51 | 18.20 | 22.41 | 25 |
| 16 | 19.05 | 20.74 | 24.95 | 23 |
| 18 | 21.59 | 23.28 | 27.49 | 21 |
| 20 | 24.13 | 25.82 | 30.03 | 19 |
| 22 | 26.67 | 28.36 | 32.57 | 17 |
| 24 | 29.21 | 30.90 | 35.11 | 16 |
| 26 | 31.75 | 33.44 | 37.65 | 15 |

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Micro Match Connector Female SMT With Ear

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



ERYAY04GE-XX-R-□-□

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN