

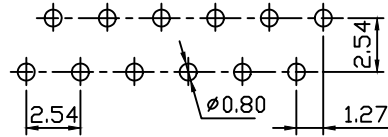
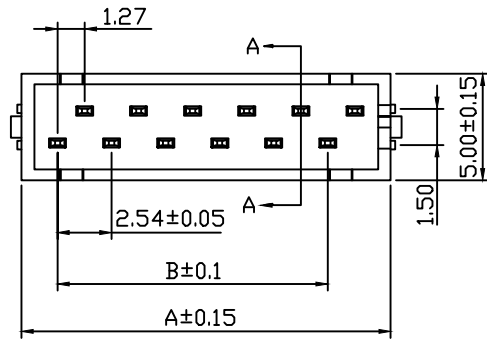


RoHS Compliance

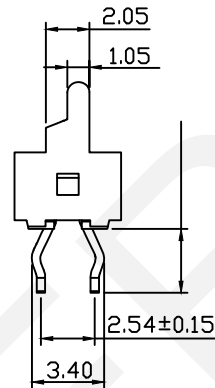

Material:  
 Housing :PBT/PA46 UL94V-0  
 Contacts: Brass  
 Plating: Sn Over Ni

Electrical Characteristics:  
 Current Rating : 1.0AMP  
 Contact Resistance: 20MΩ ohm Max  
 Insulator Resistance: 1000MΩ ohm Min  
 Withstand Voltage: 500V AC  
 Operating Temperature:-40°C~+105°C

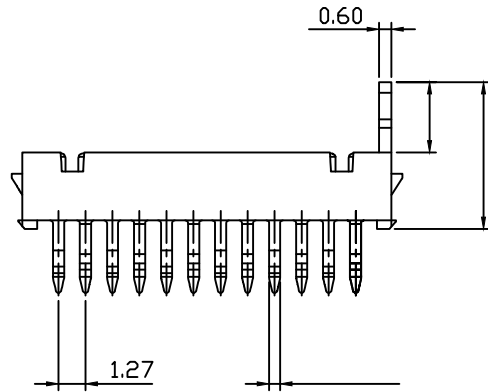

Poles	DIM.A	DIM.B	Qty/Tube
04	8.45	2.54	68
06	10.99	5.08	52
08	13.53	7.62	42
10	16.07	10.16	36
12	18.61	12.70	31
14	21.15	15.24	27
16	23.69	17.78	24
18	26.23	20.32	22
20	28.77	22.86	20
22	31.31	25.40	18
24	33.85	27.94	17
26	36.39	30.48	16

Order Information:

ERYAY04M-XX-R-□-□

Pitch:2.54mm

XX-No.of 04~26pin

Color:R-Red B-Black

Material:

A=PBT D=PA9T E=PA46

Packing:

NONE=Tube R=Reel

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

THIRD ANGLE PROJECTION



Micro Match Connector

ERYAY04M-XX-R-□-□