

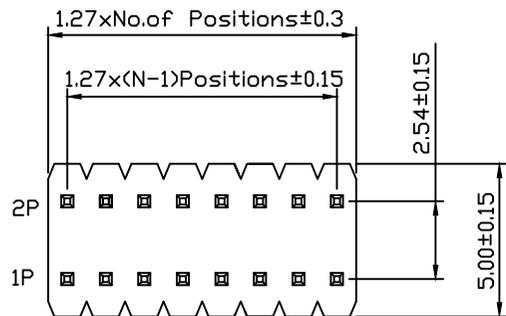
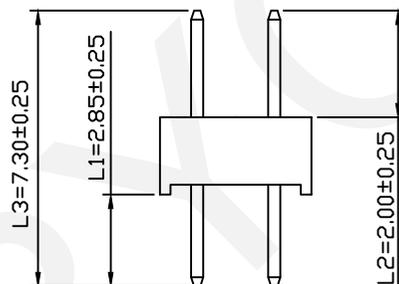


RoHS Compliance

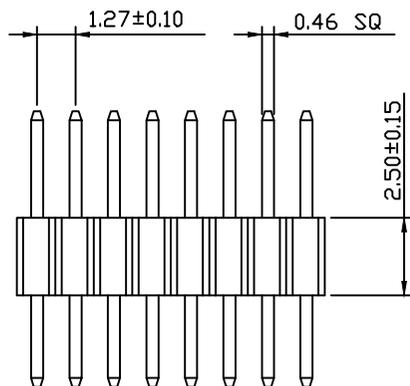

Recommended P.C.B Hole Layout

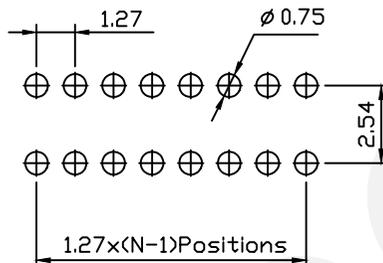

Material:  
 Standard: PA6T  
 Contact: Brass  
 Insulator: Polyester, UL94V-0  
 Electrical Characteristics:  
 Rated Current: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulator Resistance: 1000MΩ Min  
 Mechanical  
 Operating Temperature: -40°C~+105°C  
 Max.Processing Temp: 230°C For 30-60 Seconds (260°C For 10 Seconds)

Order Information:  
ERYAY07D-2-XX-S-L1xL2xL3-G0


Pin Header Series  
 07D: 1.27mm  
 Per Row: Double Layer  
 Pin: No. of Pins (2~100)  
 Type: Straight Pin  
 Size: L1xL2xL3  
 Plating:  
 G0=Gold Flash G1=1u" Gold  
 G10=10u" Gold G15=15u" Gold  
 G30=30u" Gold

Dimension Antitheses List (mm)


ITEM	L1	L2	L3	Plastic Height
Standard	2.85	2.00	7.30	2.50
Nonstandard	---	---	---	---

NINGBO ERYCO ELECTRONIC CO.,LTD




UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

1.27mm Pin Header  
 Double Layer, Straight Pin, 2xN Pin  
 THIRD ANGLE PROJECTION  
 ERYAY07D-2-XX-S-L1xL2xL3-G0

RoHS Compliance

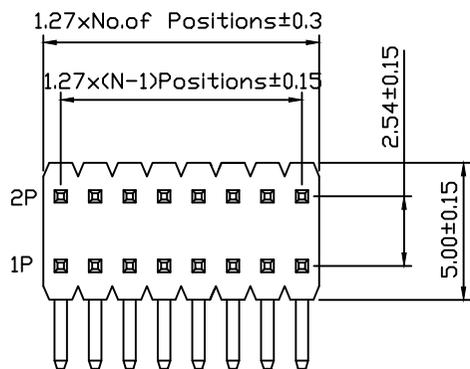

Recommended P.C.B Hole Layout

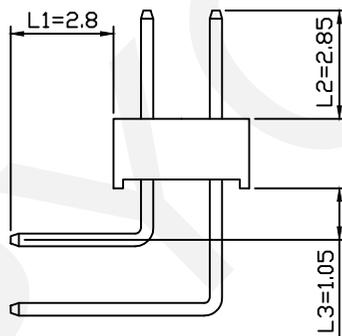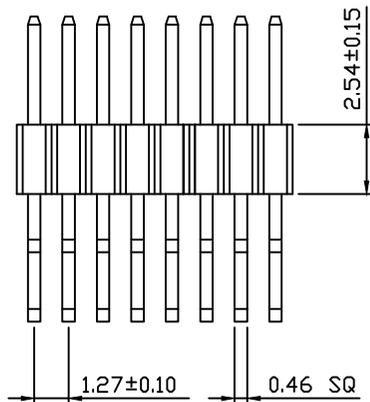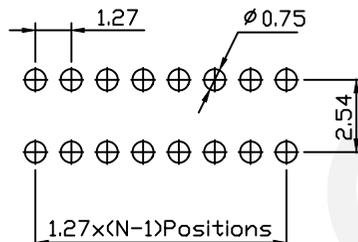

R1 Type

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	2.80	2.85	1.05	2.54
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester,UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:230°C For30-60

Seconds(260°C For10 Seconds)

Order Information:

ERYAY07D-2-XX-R1-L1xL2xL3-G0

Pin Header Series

07D:1.27mm

Per Row:Double Layer

Pin: No. Of Pins (2~100)

Right Angle Pin:R1 Type

Size:L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold





NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

1.27mm Pin Header	
Double Layer,Right Angle Pin, 2xN Pin	
THIRD ANGLE PROJECTION	ERYAY07D-2-XX-R1-L1xL2xL3-G0

RoHS Compliance

Recommended P.C.B Hole Layout

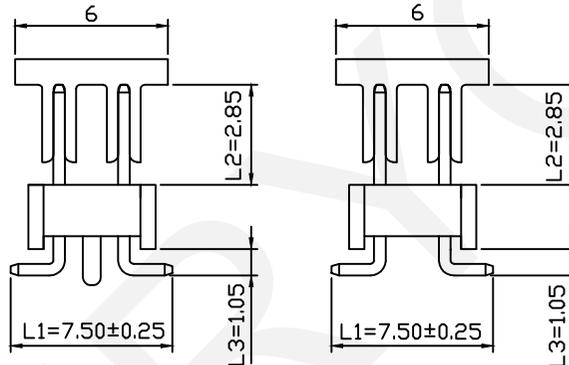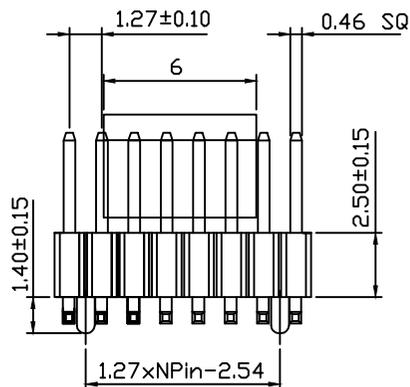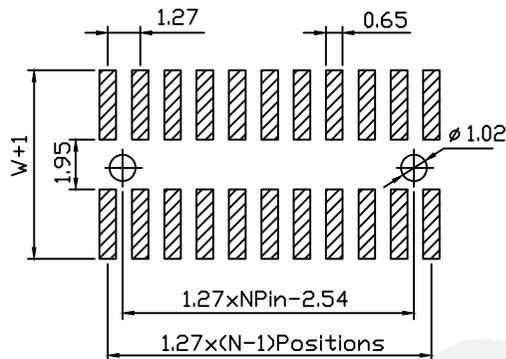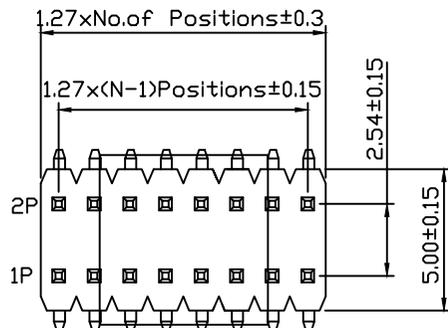

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	7.50	2.85	1.50	2.50
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C ~ +105°C

Max. Processing Temp: 230°C For 30-60 Seconds  
 260°C For 10 Seconds

Order Information:

ERYAY07D-2-XX-T-L1xL2xL3-G0-R

Pin Header Series

07D: 1.27mm

Per Row: Double Layer

Pin: No. of Pins (2~100)

SMT

T=Without Post, T3=With Post

Size: L2xL4xW

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold

Packing:

0=PE Bag A=Tray T=Tube

P=Tube+Cap R=Reel+Cap

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG	APPR BY ZHAN		

1.27mm Pin Header Double Layer, SMT, 2xN Pin

THIRD ANGLE PROJECTION



ERYAY07D-2-XX-T-L1xL2xL3-G0-R