


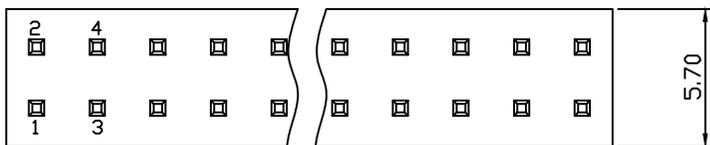


RoHS Compliance

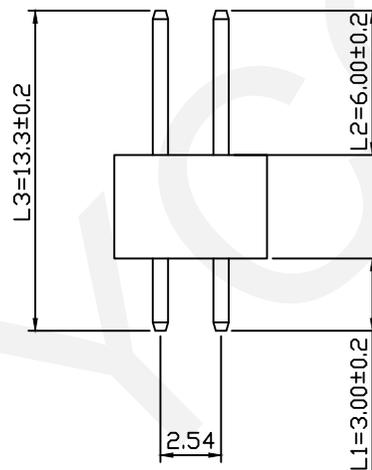

Recommended P.C.B Hole Layout

Material:
 Standard: PA6T/UL94V-0
 Contact: Brass
 Electrical Characteristics:
 Rated Current: 3AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulator Resistance: 1000MΩ Min
 Withstanding Voltage: AC 500V
 Mechanical
 Operating Temperature: -40°C~+105°C

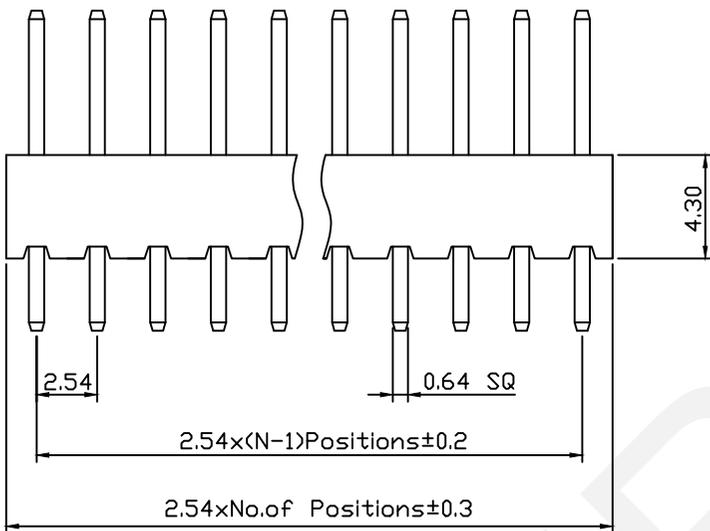

Order Information:

ERYAY07L-2-XX-S-L1xL2xL3-G0

Pin Header Series
 07L:2.54mm
 Per Row: Dual Row
 Pin: No. of Pins (02~80)
 Type: Straight Pin.
 Size: L1xL2xL3
 Plating:

G0=Gold Flash G1=1u' Gold
 G10=10u' Gold G15=15u' Gold
 G30=30u' Gold



Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	3.00	6.00	13.30	4.30
Nonstandard	---	---	---	---

NINGBO ERYCO ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.54x4.3 Pin Header
 Dual Row, Straight Pin, 2xN Pin
 THIRD ANGLE PROJECTION
 ERYAY07L-2-XX-S-L1xL2xL3-G0

RoHS Compliance

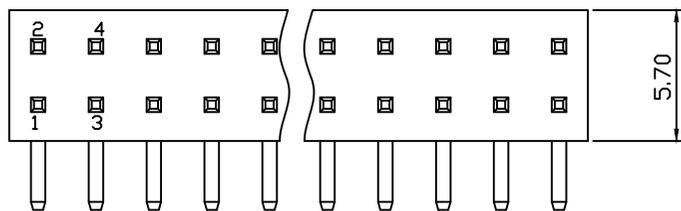

Recommended P.C.B Hole Layout

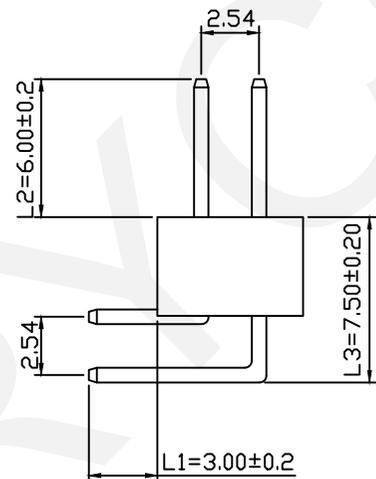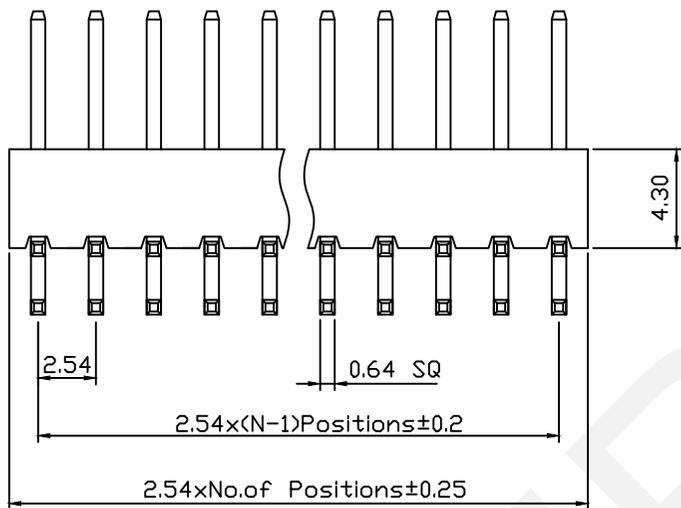

Material:
 Standard: PA6T/UL94V-0
 Contact: Brass
 Electrical Characteristics:
 Rated Current: 3AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulator Resistance: 1000MΩ Min
 Withstanding Voltage: AC 500V
 Mechanical
 Operating Temperature: -40°C~+105°C


Order Information:
 ERYAY07L-2-XX-R-L1xL2xL3-G0

Pin Header Series: 07L:2.54mm
 Per Row: Dual Row
 Pin: No. Of Pins (02~80)
 Type: Right Angle Pin
 Size: L1xL2xL3
 Plating:
 G0=Gold Flash G1=1u" Gold
 G10=10u" Gold G15=15u" Gold
 G30=30u" Gold



Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	3.00	6.00	7.50	4.30
Nonstandard	---	---	---	---

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	



2.54x4.3 Pin Header
 Dual Row, Right Angle Pin, 2xN Pin
 THIRD ANGLE PROJECTION

 ERYAY07L-2-XX-R-L1xL2xL3-G0

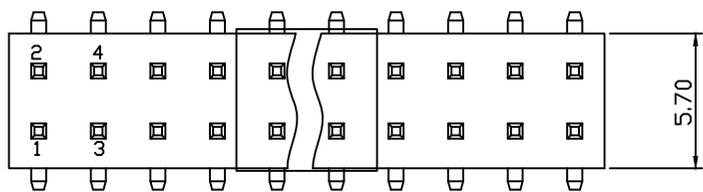RoHS Compliance



Recommended P.C.B Hole Layout

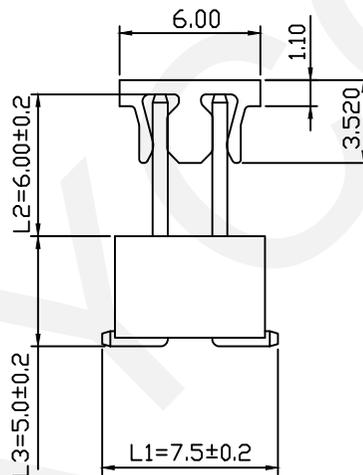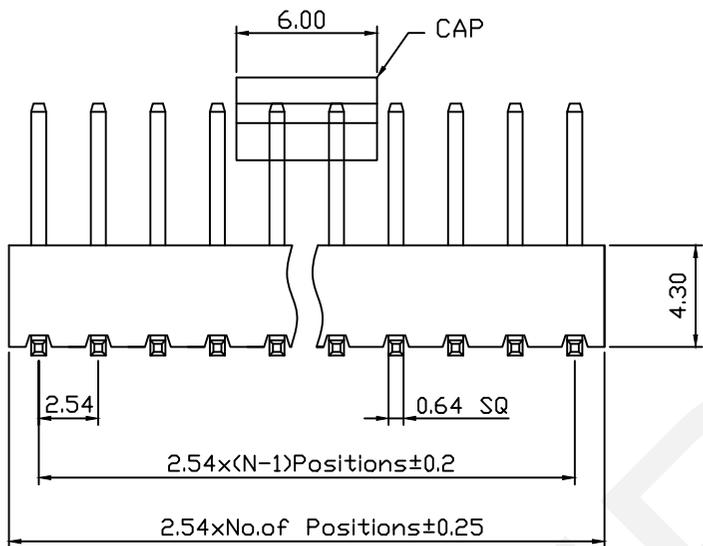Material:
 Standard: PA6T/UL94V-0
 Contact: Brass
 Electrical Characteristics:
 Rated Current: 3AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulator Resistance: 1000MΩ Min
 Withstanding Voltage: AC 500V
 Mechanical
 Operating Temperature: -40°C~+105°C



Order Information:
ERYAY07L-2-XX-T-L1xL2xL3-G0

Pin Header Series
 07L:2.54mm
 Per Row: Dual Row
 Pin: No. Of Pins (02~80)
 Type: SMT Pin
 Size: L1xL2xL3
 Plating:
 G0=Gold Flash G1=1u" Gold
 G10=10u" Gold G15=15u" Gold
 G30=30u" Gold

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	7.50	6.00	5.00	4.30
Nonstandard	---	---	---	---

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

2.54x4.3 Pin Header
 Dual Row,SMT Pin, 2xN Pin
 THIRD ANGLE PROJECTION
 ERYAY07L-2-XX-T-L1xL2xL3-G0