
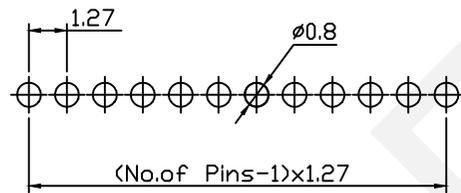
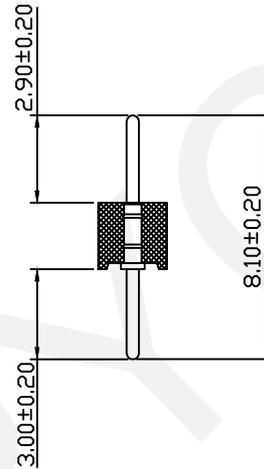
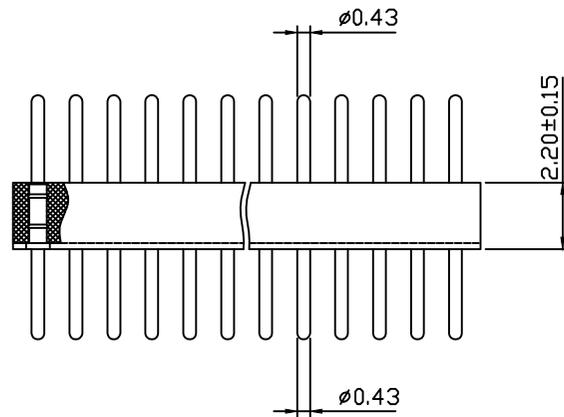


RoHS Compliance

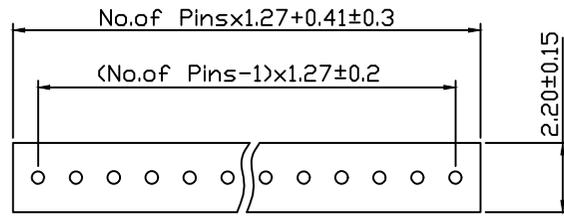

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Electrical Characteristics:

Current Rating : 1.0AMP

Voltage Rating : 60V AC/DC

Insulator Resistance: 1000M Ω min. at 100V AC

Contact Resistance: 20m Ω max.

Operating Temperature: -40 $^{\circ}$ C ~ +105 $^{\circ}$ C

Order Information:

ERYAY09XC-2.2-1-XX-S

IC Socket

Height:

2.2mm, 1.9mm

ROW

1-Single Layer

2-Double Layer

No. of 2~100 Pins


Type: S Straight Pin

R-Right Angle Pin T-SMT Pin

NINGBO ERYCO ELECTRONIC CO.,LTD



UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN

1.27x1.27mm Round Pin Header
SIP Socket Connector



ERYAY09XC-2.2-1-XX-S

RoHS Compliance

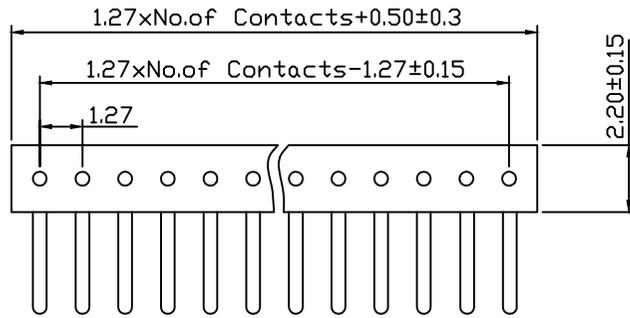

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Electrical Characteristics:

Current Rating : 1.0AMP

Voltage Rating : 60V AC/DC

Insulator Resistance: 1000MΩ min. at 100V AC

Contact Resistance: 20mΩ max.

Operating Temperature: -40°C ~ +105°C

Order Information:

ERYAY09XC-1.9-1-XX-R

IC Socket

Height:

2.2mm, 1.9mm

ROW



1-Single Layer

2-Double Layer

No. of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T-SMT Pin

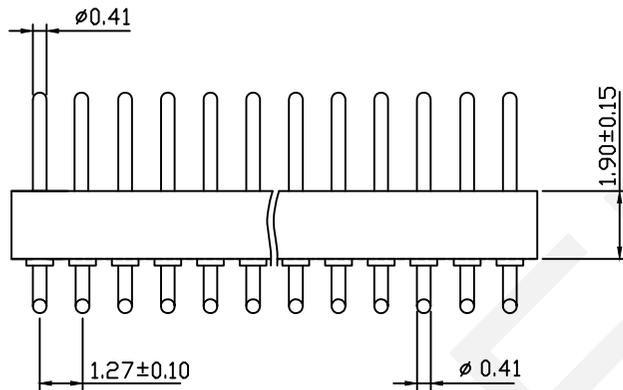

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN



1.27x1.27mm Round Pin Header
SIP Socket Connector

THIRD ANGLE PROJECTION





ERYAY09XC-1.9-1-XX-R

RoHS Compliance

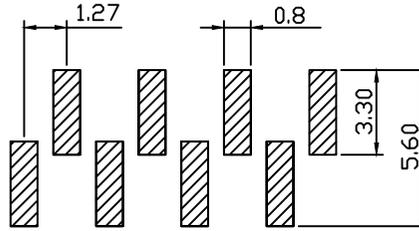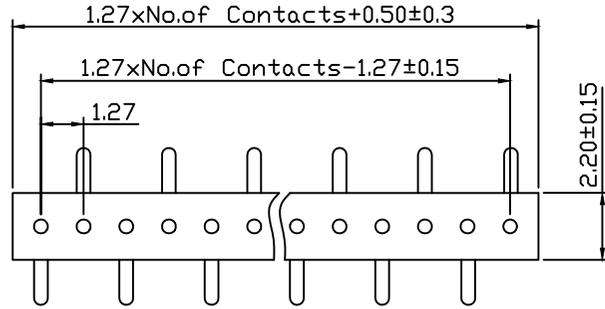

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

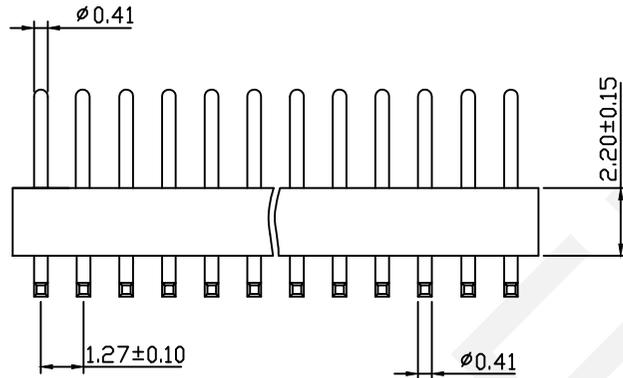

Material:

Housing:30% Glass Filled PPS UL94V-0

Contacts:Brass

Electrical Characteristics:

Current Rating :1.0AMP

Voltage Rating :60V AC/DC

Insulator Resistance:1000MΩ min.at 100V AC

Contact Resistance:20mΩ max.

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY09XC-1.9-1-XX-T2-T

IC Socket

Height:

2.2mm,1.9mm

R0W

1-Single Layer

2-Double Layer

No.of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T2-SMT Pin

Packing: T=Tube R=Reel

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x1.27mm Round Pin Header
SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

ERYAY09XC-1.9-1-XX-T2-T

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5





6

7

8

9

RoHS Compliance

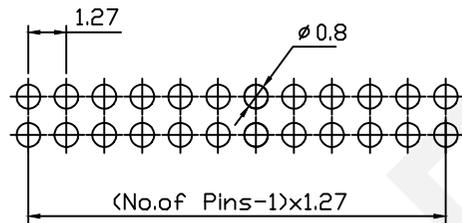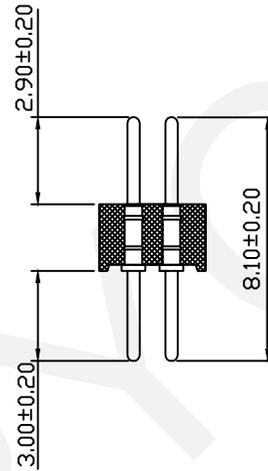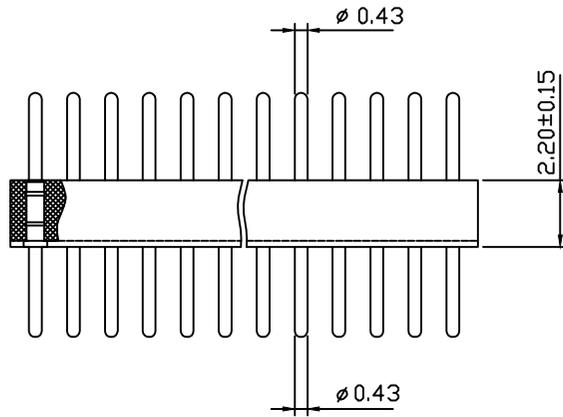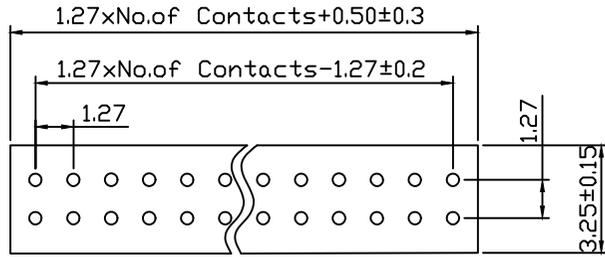

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Electrical Characteristics:

Current Rating: 1.0AMP

Voltage Rating: 60V AC/DC

Insulator Resistance: 1000MΩ min. at 100V AC

Contact Resistance: 20mΩ max.

Operating Temperature: -40°C ~ +105°C

Order Information:

ERYAY09XC-2.2-2-XX-S

IC Socket

Height:

2.2mm, 1.9mm

RDW

1-Single Layer

2-Double Layer

No. of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T-SMT Pin

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

1.27x1.27mm Round Pin Header
SIP Socket Connector

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



ERYAY09XC-2.2-2-XX-S

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

1

2

3

4

5



6

7



8

9

RoHS Compliance

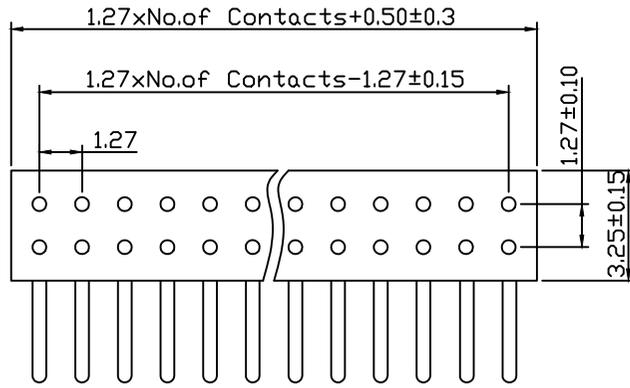

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

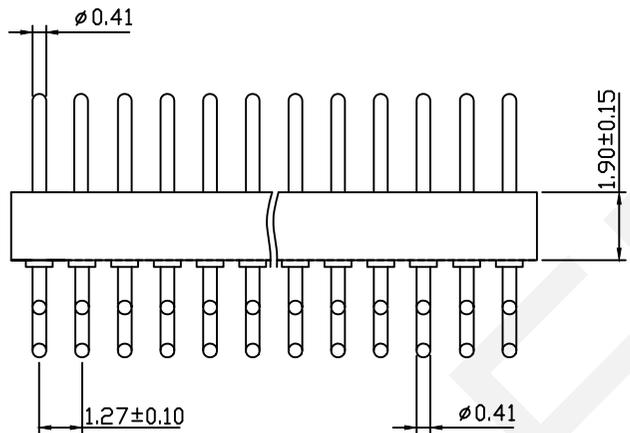

Material:

Housing:30% Glass Filled PPS UL94V-0

Contacts:Brass

Electrical Characteristics:

Current Rating :1.0AMP

Voltage Rating :60V AC/DC

Insulator Resistance:1000MΩ min.at 100V AC

Contact Resistance:20mΩ max.

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY09XC-1.9-2-XX-R

IC Socket

Height:

2.2mm,1.9mm

ROW

1-Single Layer

2-Double Layer

No.of 2~100 Pins

Type: S Straight Pin

R-Right Angle Pin T-SMT Pin

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27x1.27mm Round Pin Header
SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

ERYAY09XC-1.9-2-XX-R

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5



6

7



8

9

RoHS Compliance

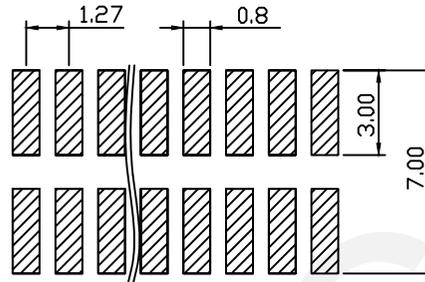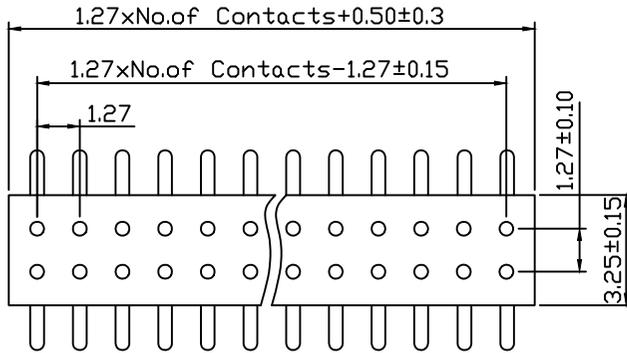

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

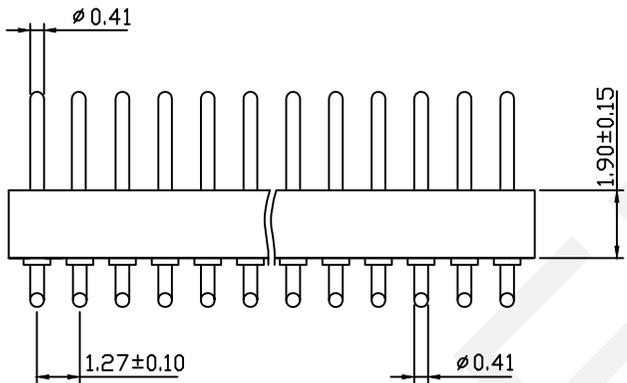

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Brass

Electrical Characteristics:

Current Rating : 1.0AMP

Voltage Rating : 60V AC/DC

Insulator Resistance: 1000MΩ min. at 100V AC

Contact Resistance: 20mΩ max.

Operating Temperature: -40°C ~ +105°C

Order Information:

ERYAY09XC-1.9-2-XX-T-T

IC Socket

Height:

2.2mm, 1.9mm

ROW

1-Single Layer

2-Double Layer

No. of 2 ~ 100 Pins

Type: S Straight Pin

R-Right Angle Pin T-SMT Pin

Packing: T=Tube R=Reel

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

1.27x1.27mm Round Pin Header
SIP Socket Connector

THIRD ANGLE PROJECTION

ERYAY09XC-1.9-2-XX-T-T