

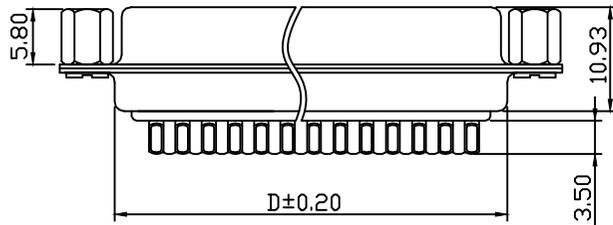


RoHS Compliant

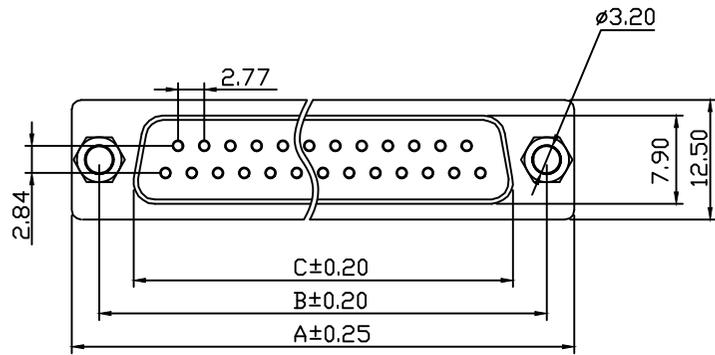

Material:
 Housing:PBT+30% Glass Filled,UL94V-0
 Contacts:Brass ,
 Gold Plating On Contact Arer,
 Tin On Solder Tail.
 Shell:Steel,
 Front Shell Nickel Plating,
 Back Shell Tin Plating

Electrical Characteristics:
 Current Rating:5AMP
 Insulator Resistance:1000MΩ Min. at DC 500V
 Withstanding Voltage: 500V AC (rms) For 1 Minute
 Contact Resistance:20MΩ Max. Initial
 Operating Temperature:-55°C~+105°C

Order Information:

ERYAY13A-XX-F-L

D-SUB Connector,

Type:13A

XX-No.of 09,15,25,37 Pins

Connector Type:

M-Male F-Female,

Housing Color:


L-Blue B-Black W-White

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	16.50	19.10
15	39.20	33.32	24.70	27.50
25	53.04	47.04	38.50	41.30
37	69.40	63.50	54.80	57.70

NINGBO ERYCO ELECTRONIC CO.,LTD




UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN



ERYAY13A-XX-F-L

RoHS Compliant

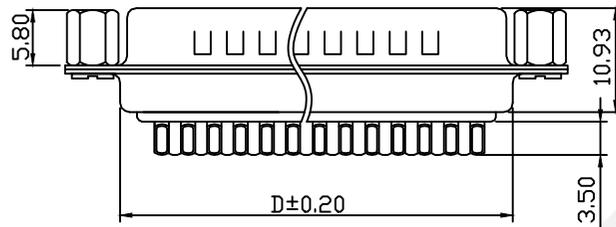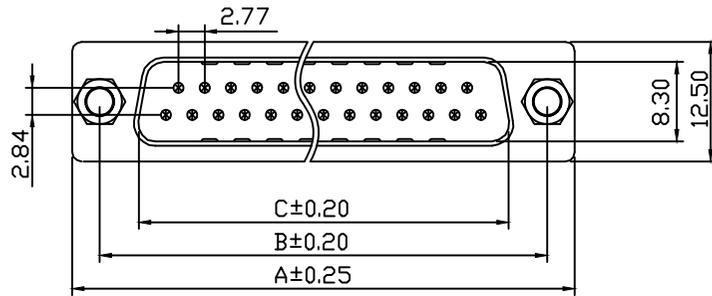

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass ,

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell:Steel,

Front Shell Nickel Plating,

Back Shell Tin Plating

Electrical Characteristics:

Current Rating:5AMP

Insulator Resistance1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-55°C~+105°C

Order Information:

ERYAY13A-XX-M-L

D-SUB Connector,

Type:13A

XX-No.of 09,15,25,37 Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black W-White

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	17.79	19.10
15	39.20	33.32	25.30	27.50
25	53.04	47.04	38.96	41.30
37	69.40	63.50	55.40	57.70

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

D-SUB Connector,Solder Type,Female,Riveting Before

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



ERYAY13A-XX-M-L

1

2

3

4

5




6

7

8

9

RoHS Compliant

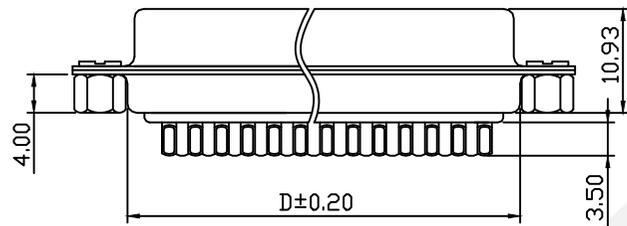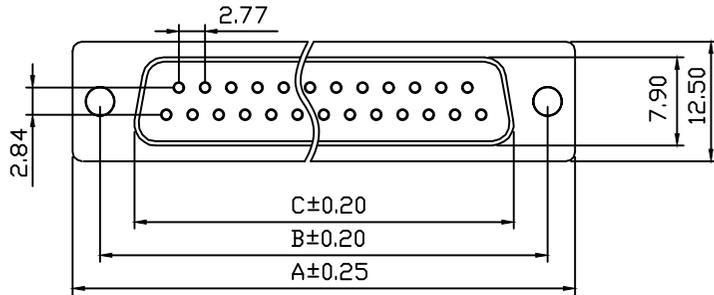

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,

Gold Plating On Contact Area,

Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,

Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

ERYAY13D-XX-F-L

D-SUB Connector,

Type: 13D

XX-No. of 09, 15, 25, 37 Pins

Connector Type: _____

M-Male F-Female,

Housing Color: _____

L-Blue B-Black W-White

Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	16.50	19.10
15	39.20	33.32	24.70	27.50
25	53.04	47.04	38.50	41.30
37	69.40	63.50	54.80	57.70

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

D-SUB Connector, Solder Type, Female, Riveting Before

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



ERYAY13D-XX-F-L

±0.12




±0.15

±0.3

±0.5

APPR BY ZHAN

RoHS Compliant

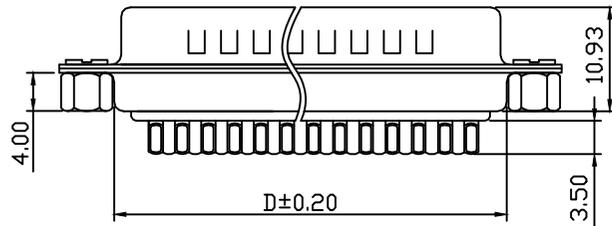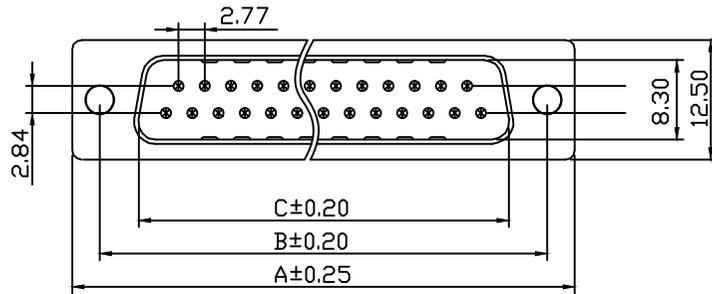

Material:

Housing: PBT+30% Glass Filled, UL94V-0

Contacts: Brass,
Gold Plating On Contact Area,
Tin On Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,
Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5AMP

Insulator Resistance: 1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance: 20MΩ Max. Initial

Operating Temperature: -55°C ~ +105°C

Order Information:

ERYAY13D-XX-M-L

D-SUB Connector,

Type: 13D

XX-No. of 09, 15, 25, 37 Pins

Connector Type:

M-Male F-Female,

Housing Color:

L-Blue B-Black W-White


Number of Contacts	DIMENSION			
	A±0.25	B±0.20	C±0.20	D±0.20
09	30.80	25.00	17.79	19.10
15	39.20	33.32	25.30	27.50
25	53.04	47.04	38.96	41.30
37	69.40	63.50	55.40	57.70

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

D-SUB Connector, Solder Type, Female, Riveting Before



ERYAY13D-XX-M-L