
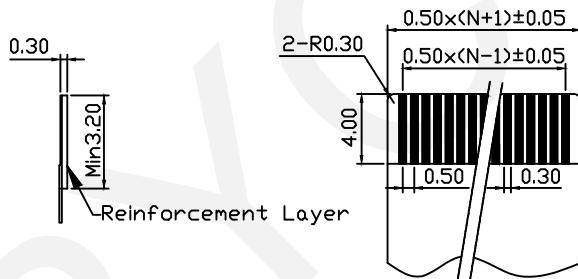


Material  
 Housing:LCP UL94V-0  
 Actuator:LCP UL94V-0  
 Contacts:Copper Alloy  
 PEG:Copper Alloy  
 Contacts:Tin Over Nickel  
 PEG Plating: Tin Over Nickel


Electrical  
 Voltage Rating: 50V  
 Current Rating: 0.3A

Mechanical  
 Temp.Range:-25°C~+85°C

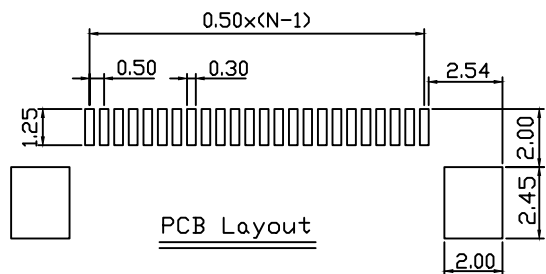


Order Information  
ERYAY42D-1.2-XX-T-U-R






Series No. |  
 Height:1.2mm |  
 No.of Pins |  
 (04~35 Pins) |  
 T-SMT Pin |  
 U-Upper Contact |  
 Pack: T-Tube R-Reel |

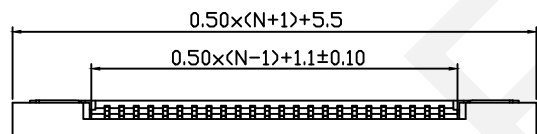


UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	CONN FFC 0.50mm,SMD, Horizontal, Upper Contact ,With ZIF	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	THIRD ANGLE PROJECTION	ERYAY42D-1.2-XX-T-U-R

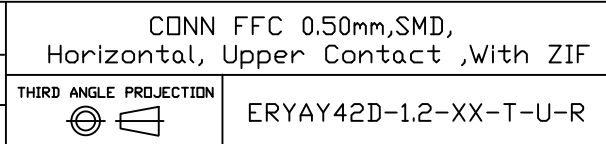


NINGBO ERYCO ELECTRONIC CO.,LTD

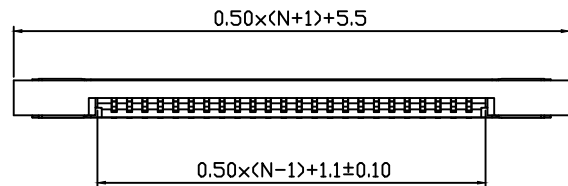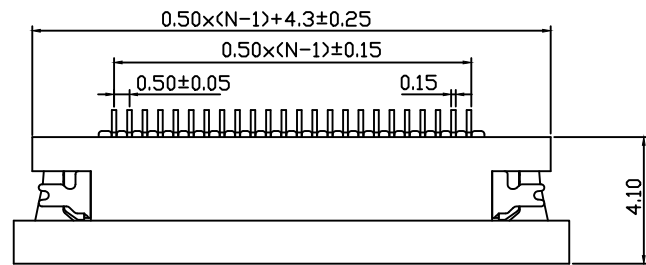

Reinforcement Layer



Recommended FPC Dimension

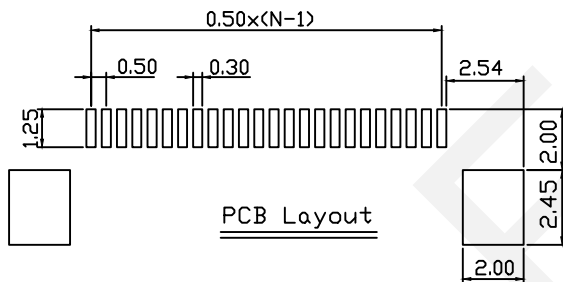

PCB Layout

Material  
 Housing:LCP UL94V-0  
 Actuator:LCP UL94V-0  
 Contacts:Copper Alloy  
 PEG:Copper Alloy  
 Contacts: Tin Over Nickel  
 PEG Plating: Tin Over Nickel

Electrical  
 Voltage Rating: 50V  
 Current Rating: 0.3A

Mechanical  
 Temp.Range:-25°C~+85°C

Order Information  
 ERYAY42D-1.2-XX-T-L-R

Series No. |  
 Height:1.2mm |  
 No.of Pins |  
 (04~35 Pins) |  
 T-SMT Pin |  
 L-Lower Contact |  
 Pack: T-Tube R-Reel |

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD, Horizontal, Lower Contact ,With ZIF	
THIRD ANGLE PROJECTION 	ERYAY42D-1.2-XX-T-L-R