
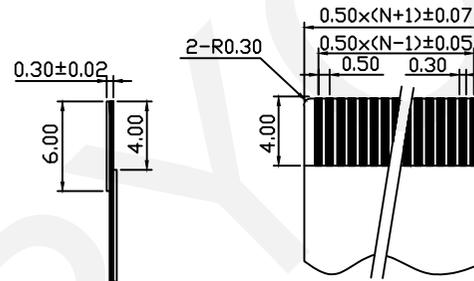


Material  
 Housing:LCP UL94V-0  
 Lock:LCP,UL94V-0  
 Plug Spring:Phosphor bronze,Gold/Tin  
 Solder:Brass,Gold/Tin

Electrical  
 Voltage Rating: 50 V  
 Current Rating: 0.4 A  
 Withstanding Voltage:200 V  
 Insulation Resistance: 500MΩ.Min.  
 Contact Resistance: 20mΩ.Max.

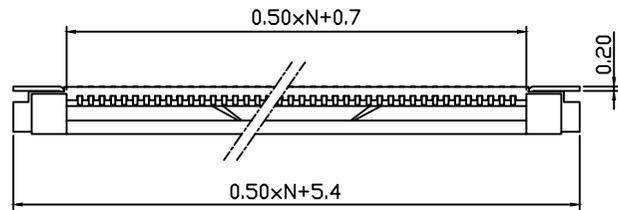


Mechanical  
 Temp Range:-20℃~+85℃

Order Information

ERYAY42G-2.0-XX-T-R

Series No. ]  
 Height:2.0mm ]  
 No.of Pins \_\_\_\_\_ ]  
 (06~60 Pins) ]  
 T-SMT Pin \_\_\_\_\_ ]  
 Pack:R-Reel \_\_\_\_\_ ]

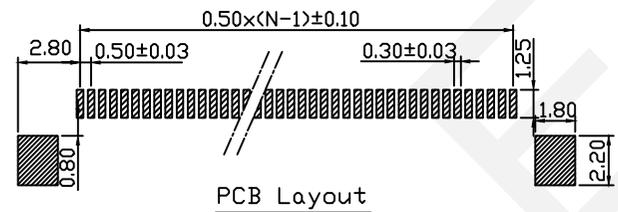

Applicable FPC

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,  
 Horizontal, Lower Contact ,With ZIF

THIRD ANGLE PROJECTION

ERYAY42G-2.0-XX-T-R