



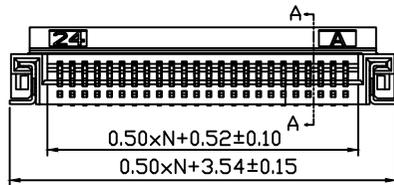


Material
 Housing:LCP UL94V-0
 Terminal:Phosphor Bronze ,Gold/Tin
 Cover:LCP,UL94V-0
 Solder:Phosphor Bronze,Tin

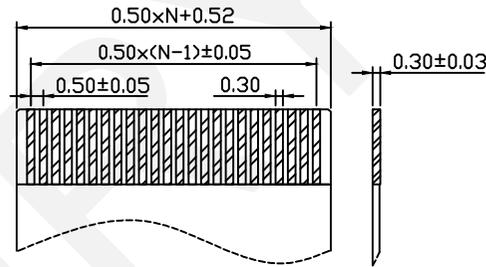


Electrical
 Voltage Rating: 50 V
 Insulation Resistance: 500MΩ.Min.
 Contact Resistance: 30mΩ.Max.

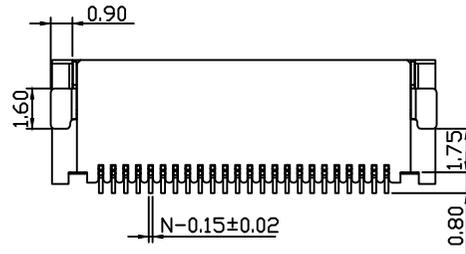

Mechanical
 Temp Range:-25℃~+85℃

Order Information
 ERYAY42I-2.0-XX-T-R

Series No. _____
 Height:2.0mm _____
 No.of Pins _____
 (04~60 Pins)
 T-SMT Pin _____
 Pack:T-Tube R-Reel _____



Proper Cable

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,Horizontal,With ZIF	
THIRD ANGLE PROJECTION	ERYAY42I-2.0-XX-T-R