

SECTION A-A

Material

Housing: LCP UL94V-0

Terminal: Phosphor Bronze, Gold/Tin

Cover: LCP, UL94V-0

Solder: Phosphor Bronze, Tin

Electrical

Voltage Rating: 50V

Insulation Resistance: $500M\Omega$.Min.

Contact Resistance: $30m\Omega$.Max.

Mechanical

Temp Range: $-25^\circ C \sim +85^\circ C$

Order Information

ERYAY42J-1.0-XX-T-R

Series No.]



Height: 1.0mm]

No. of Pins]


(04~60 Pins)

T-SMT Pin]

Pack: T-Tube R-Reel]

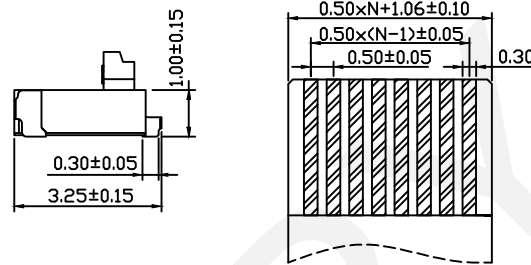

Proper Cable

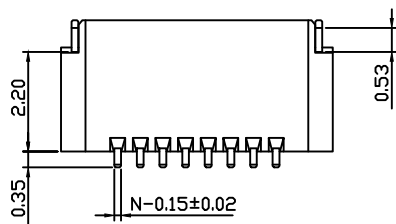

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN	CONN FFC 0.50mm,SMD,Horizontal, With ZIF	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION		ERYAY42J-1.0-XX-T-R
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN			