


A-A



Applied Flat Line

Material

Housing:Thermoplastic UL94V-0

Terminal:Phosphor Bronze Tin-plated

Fitting Nial:Phosphor Bronze Tin-plated

Electrical

Voltage Rating: 48V

Current Rating: 0.4A

Insulation Resistance: 500mΩ.Min.

Confact Resistance: 20 mΩ.max.

Mechanical

Temp.Range:-25℃~+85℃

Order Information

ERYAY42K-3.7-XX-T-P-R

Series No.]

Height:3.7mm



No.of Pins

(06~60 Pins)

T-SMT Pin

P-Positive Needle

Pack: T-Tube R-Reel

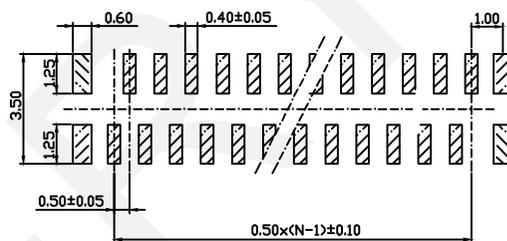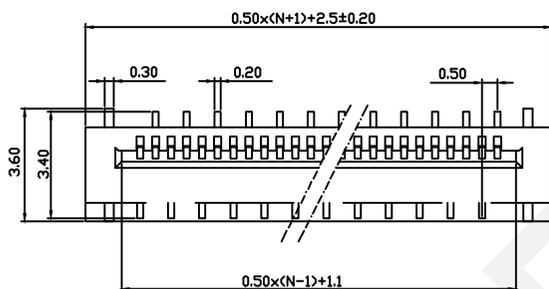

PCB Layout

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 0.50mm,SMD,Vertical

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



ERYAY42K-3.7-XX-T-P-R

1

2

3

4

5

6

7

8

9