

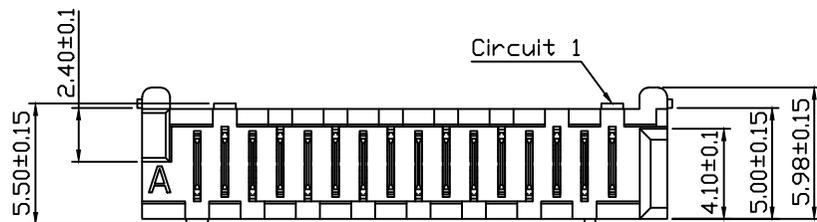
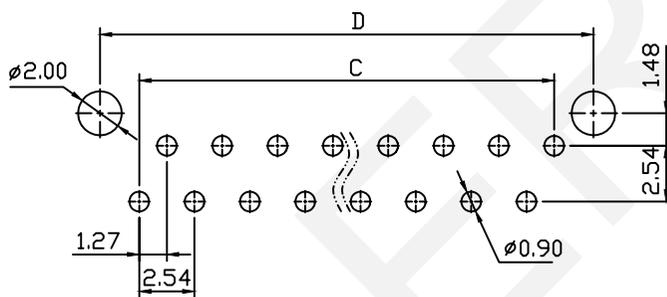
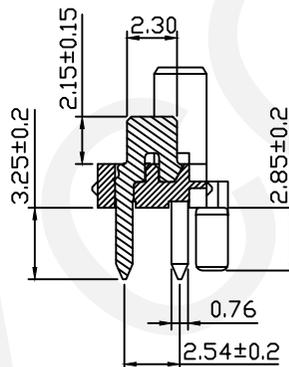


RoHS Compliance

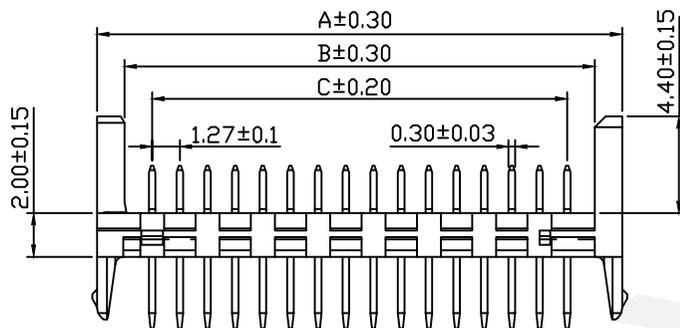

Material:  
 Housing: PA6T,UL94V-0,Black  
 Contacts: Brass  
 Plating: Sn Over 50u" Nickel

Electrical Characteristics:  
 Current Rating : 1.2AMP  
 Voltage Rating : 250V AC  
 Insulator Resistance: 1000M ohm min.  
 Withstand Voltage: 500V AC/Minute  
 Contact Resistance: 20M ohm Max  
 Operating Temperature:-40°C~+105°C



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Order Information:  
ERYAYICS-XX  
 IDC Connectors  
 1.27mm Pitch  
 XX-No.of 04~26pin

Pin	Dimension mm			
	A	B	C	D
04	8.86	6.35	3.81	7.41
06	11.40	8.89	6.35	9.95
08	13.94	11.43	8.89	12.49
10	16.48	13.94	11.43	15.03
12	19.02	16.51	13.97	17.57
14	21.56	19.05	16.51	20.11
16	24.10	21.59	19.05	22.65
18	26.64	24.13	21.59	25.19
20	29.18	26.67	24.13	27.73
22	31.72	29.21	26.67	30.27
24	34.26	31.75	29.21	32.81
26	36.80	34.29	31.75	35.35

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

1.27mm Pitch MOLEX 90325 Picoflex  
 Ribbon Cable Connectors

THIRD ANGLE PROJECTION

ERYAYICS-XX