




PCB Layout

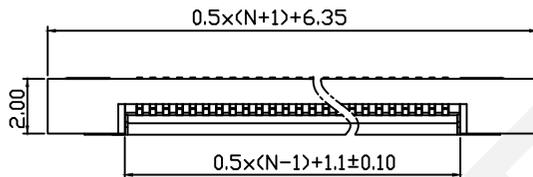

Proper Cable



Material

Housing:LCP UL94V-0

Terminal:Phosphor Bronze Tin-plated

Fitting Nial:Phosphor Bronze Tin-plated

Electrical

Voltage Rating: 50 V

Current Rating: 0.4 A

Withstanding Voltage:200 V

Insulation Resistance: 500MΩ.Min.

Contact Resistance: 20mΩ.Max.

Mechanical

Temp Range:-25℃~+85℃

Order Information

ERYAY242-2.0-XX-T-U-R

Series No.]

Height:2.0mm]

No.of Pins]

(06~60 Pins)

T-SMT Pin]

U-Upper Contact]

Pack: T-Tube R-Reel]

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5




APPR BY ZHAN

THIRD ANGLE PROJECTION



CONN FFC 0.50mm,SMD,
Horizontal, Upper Contact ,With ZIF

ERYAY242-2.0-XX-T-U-R

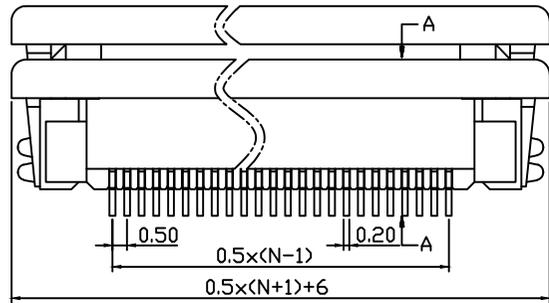

A-A

Material

Housing:LCP UL94V-0

Terminal:Phosphor Bronze Tin-plated

Fitting Nial:Phosphor Bronze Tin-plated

Electrical


Voltage Rating: 50 V

Current Rating: 0.4 A


Withstanding Voltage:200 V

Insulation Resistance: 500MΩ.Min.

Contact Resistance: 20mΩ.Max.

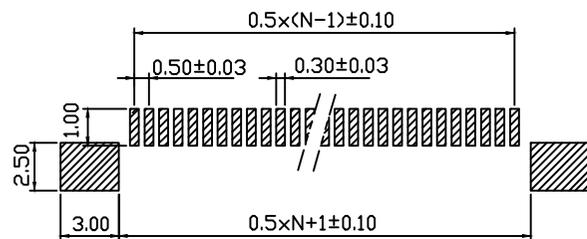

PCB Layout

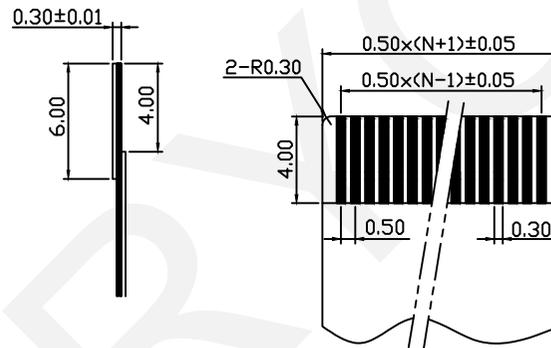

Proper Cable

Mechanical

Temp Range:-25°C~+85°C

Order Information

ERYAY242-2.0-XX-T-L-R

Series No.]

Height:2.0mm]


No.of Pins

(04~60 Pins)

T-SMT Pin

L-Lower Contact

Pack: T-Tube R-Reel

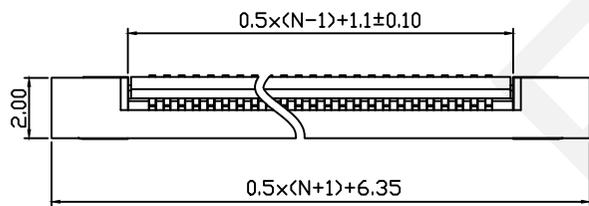

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION



CONN FFC 0.50mm,SMD,
Horizontal, Lower Contact ,With ZIF

ERYAY242-2.0-XX-T-L-R