
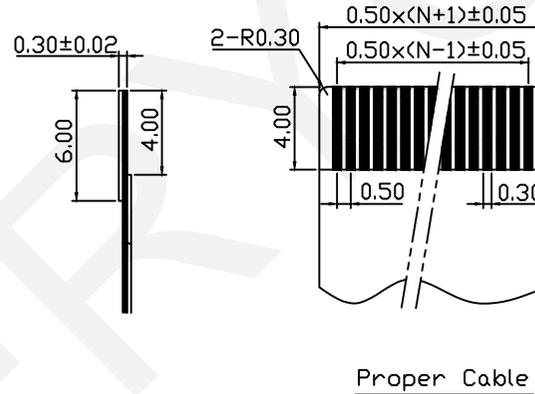


Material  
 Housing:LCP UL94V-0  
 Terminal:Phosphor Bronze Tin-plated  
 Fitting Nial:Phosphor Bronze Tin-plated


Electrical  
 Voltage Rating: 50 V  
 Current Rating: 0.4 A  
 Withstanding Voltage:200 V  
 Insulation Resistance: 500MΩ.Min.  
 Contact Resistance: 20mΩ.Max.

Mechanical  
 Temp.Range:-25℃~+85℃

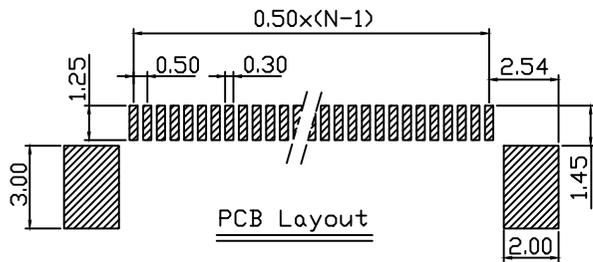

Order Information  
 ERYAY242E-2.0-XX-T-U-R




Series No. |  
 Height:2.0mm |  
 No.of pins |  
 (06~60 Pins) |  
 T-SMT Pin |  
 U-Upper Contact |  
 Pack: T-Tube R-Reel |

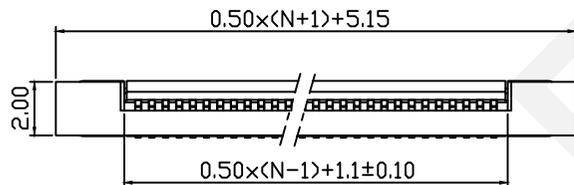

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD,  
 Horizontal, Upper Contact ,With ZIF  
 THIRD ANGLE PROJECTION  
 ERYAY242E-2.0-XX-T-U-R

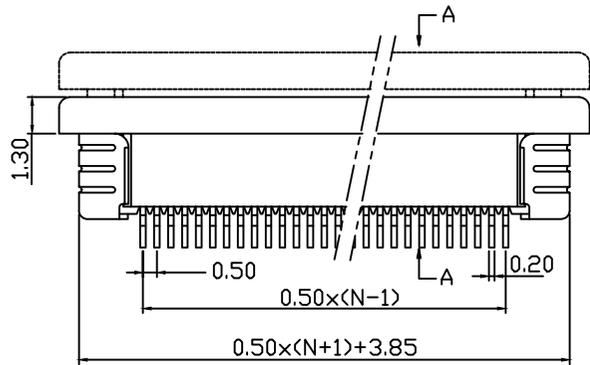

Material

Housing:LCP UL94V-0

Terminal:Phosphor Bronze Tin-plated

Fitting Nial:Phosphor Bronze Tin-plated

Electrical

Voltage Rating: 50 V

Current Rating: 0.4 A




Withstanding Voltage:200 V

Insulation Resistance: 500MΩ.Min.

Contact Resistance: 20mΩ.Max.

Mechanical

Temp Range:-25℃~+85℃

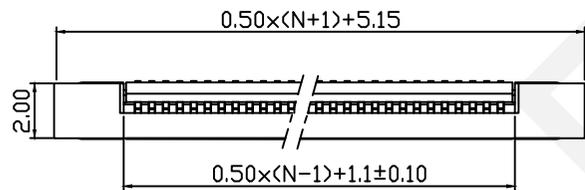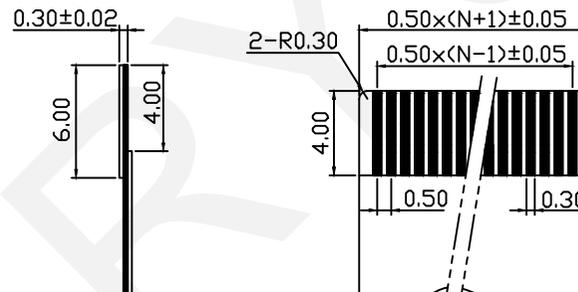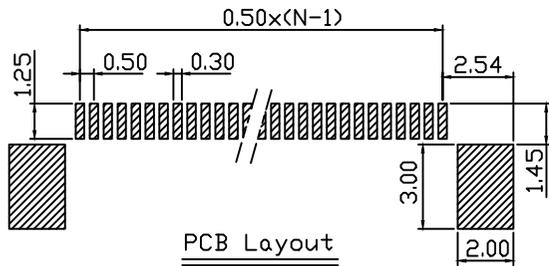

Order Information

ERYAY242E-2.0-XX-T-L-R

Series No.└

Height:2.0mm└

No.of pins└

(06~60 Pins)

T-SMT Pin└

L-Lower Contact└

Pack: T-Tube R-Reel└

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

CONN FFC 0.50mm,SMD, Horizontal, Lower Contact ,With ZIF	
THIRD ANGLE PROJECTION 	ERYAY242E-2.0-XX-T-L-R