
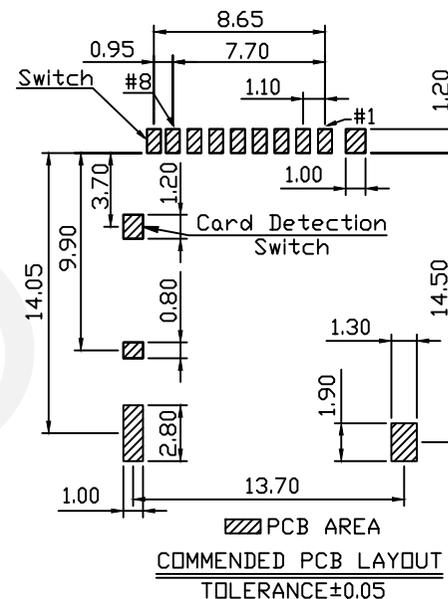
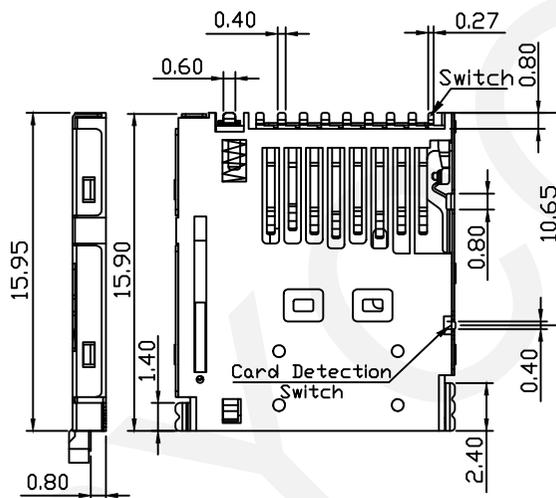
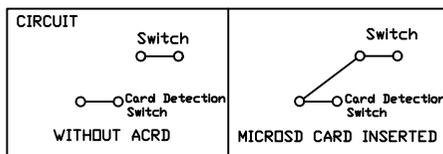


RoHS Compliance

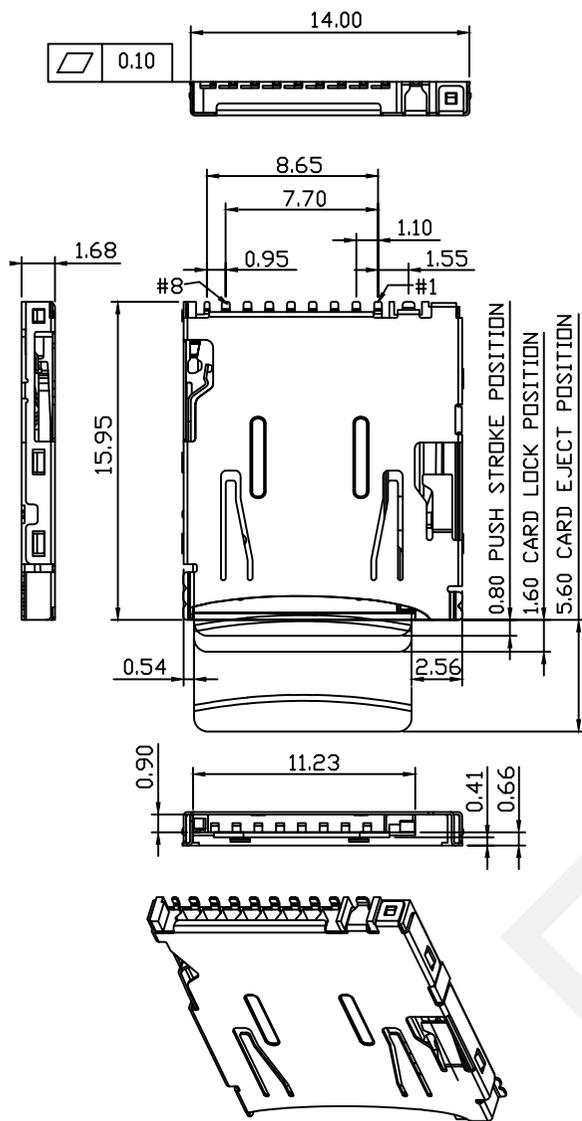

PIN No.	PIN ASSIGNMENT
1#	DAT2
2#	CD/DAT3
3#	CMD
4#	VDD
5#	CLK
6#	VSS
7#	DAT0
8#	DAT1

Material:

Insulator:Hi-Temperature Plastic,UL94V-0,Black  
Terminal:Copper Alloy,Gold Flash Plating On  
Contact Area&Solder Tail.

Shell:Stainless Steel,Nickel Underplated On  
Allover,Gold Flash On Solder Tail.

Electrical:

Insulation Resistance:1000MΩ Min./500V DC

Withstanding Voltage:250V AC/Minute.

Contact Resistance:100mΩ Max.AT 20mA/20mV Max

Current Rating:0.5A

Voltage Rating:5.0 Vrms

Operating Temp Range:-40°C TO+85°C

Mating Cycles:5000 Insertions

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG

APPR BY ZHAN

Micro SD Card CONN,PUSH/  
PUSH,H1.68mm,SMD With CD Pin

THIRD ANGLE PROJECTION



ERYAYD114-R