

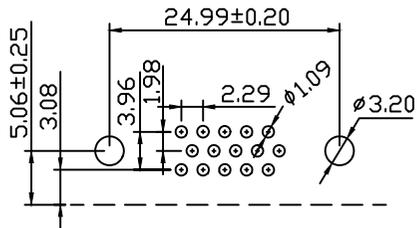
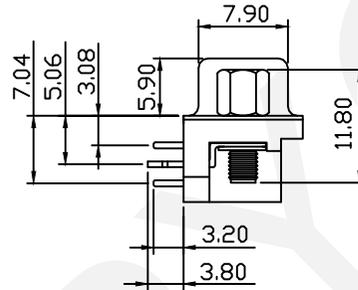
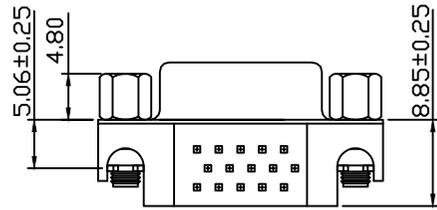


RoHS Compliant

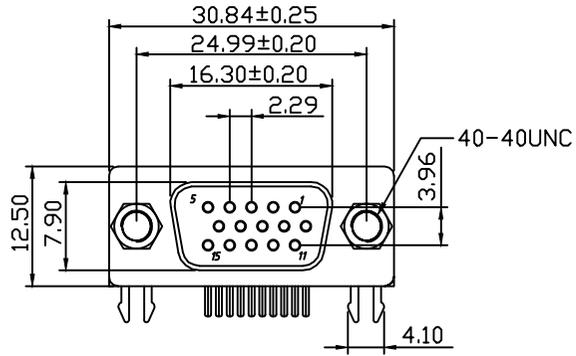

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

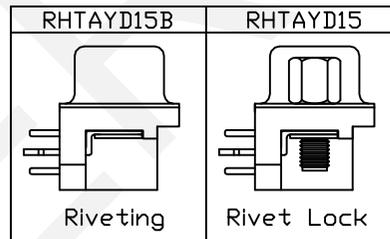

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating

Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating:5AMP

Insulator Resistance1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-55°C~+105°C

Order Information:

ERYAYD15-15-F-L

Type:D15 Or D15B

15-No.of 15Pins

Connector Type:F-Female


Housing Color: L-Blue B-Black

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	





D-SUB Connector,R/A,
Through Hole,3.08mm,Female

THIRD ANGLE PROJECTION




ERYAYD15-15-F-L

RoHS Compliant

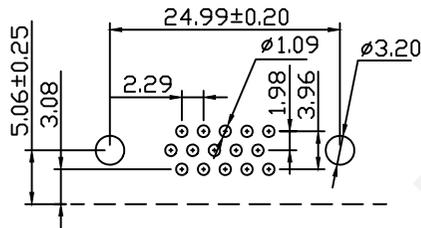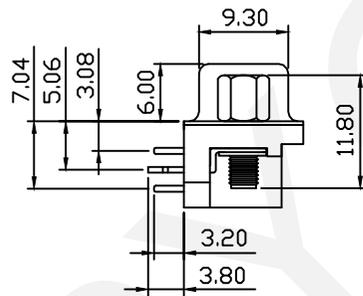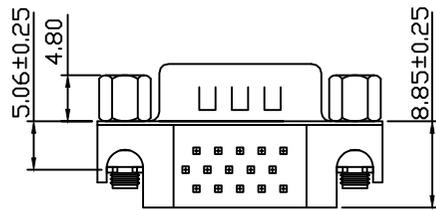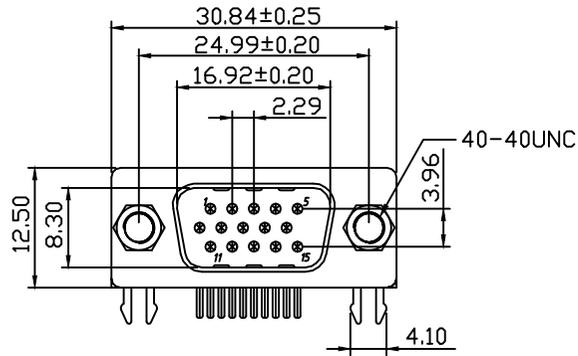

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

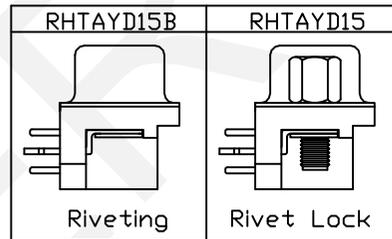

Material:

Housing:PBT+30% Glass Filled,UL94V-0

Contacts:Brass,Gold Plating

Shell:Steel,Nickel Plating,

Electrical Characteristics:

Current Rating:5AMP

Insulator Resistance:1000MΩ Min. at DC 500V

Withstanding Voltage: 500V AC (rms) For 1 Minute

Contact Resistance:20MΩ Max. Initial

Operating Temperature:-55°C~+105°C

Order Information:

ERYAYD15-15-M-L

Type:D15 Or D15B

15-No.of 15Pins


Connector Type: M-Male

Housing Color: L-Blue B-Black

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

THIRD ANGLE PROJECTION



D-SUB Connector,R/A,
Through Hole,3.08mm,Male

ERYAYD15-15-M-L