
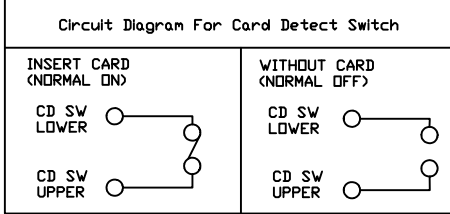


RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

SOLDER AREA
 NONE CIRCUIT DIAGRAM AREA

PIN NO.	Description
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P5#	C6:VPP
P6#	C3:CLK
P7#	C7:I/O
P8#	DET



Material:
Housing:LCP,UL94V-0
Contact:C5210R-H,T=0.15
Shell:SUS304,T=0.20
Mylar:Polyester.
Finish:
Contact:Gold Flash Plated On Contact Area;
Gold Flash Plated On SolderTails,With Entire Contact Underplated 50u" min Nickel.
Shell:50u" Min Nickel Under Plated Overall,
Gold Flash Plated On Solder Tails

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

SIM CARD CONN:PUSH PUSH,
6P,H1.85mm,SMD with CD Pin

THIRD ANGLE PROJECTION

ERYAYIM-084-R