


DETECT SWITCH

CARD INSERTING POSITION	CLOSE	CLOSE ○ SW1 ○ SW1
NO CARD	OPEN	OPEN ○ SW1 ○ SW1

Card Is Not Inserted;
Sw2 And Sw 1/GND Pin Is Open
Card Is Inserted;
Sw2 And Sw1/GND Pin Is Close

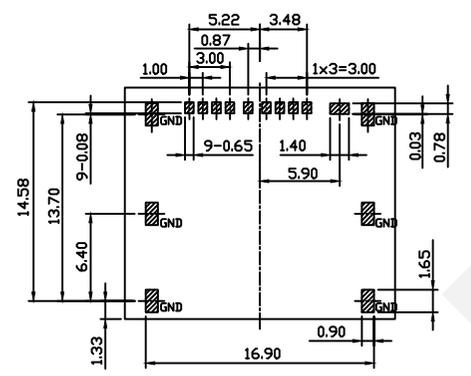

RECOMMENDED PCB LAYOUT
TOP VIEW(TOLERANCE±0.05)

Material:
Housing:High Temperature Thermoplastic,UL94V-0,Black
Terminal:Copper Alloy
Shell:Stainless Steel.

Electrical:
Current Rating: 1.0A
Rating Voltage:50V
Contact Resistance:100mΩ Max.
Insulation Resistance:1000MΩ Min./500V DC
Dielectric Withstanding Voltage:500V AC
Solder Ability:255°C+5°C,5+0.5S
Durability:5000 Cycles Min.
Operating Condition: Temperature-40°C~+85°C

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Micro SIM CONN:PUSH/PUSH,
8Pin, H1.56mm, With CD Pin

THIRD ANGLE PROJECTION

ERYAYIM-094-H1.56-R