


SECTION A-A

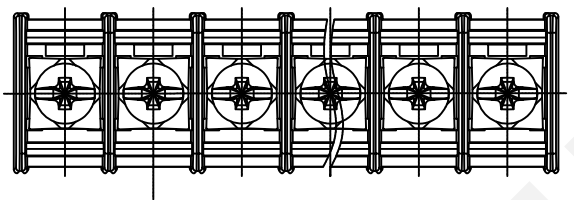

Material  
 Screw:M3.0,Steel, Ni Plated  
 Pin header:Brass,08t, Tin Plated  
 Housing:PA66,UL94 V-0,Black  
 Electrical  
 Rated voltage: 300V  
 Rated current:15A  
 Wire range:22~14AWG 2.5mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance:500MΩ/DI500V  
 Withstand voltage:AC2000V/1min  
 Mechanical  
 Temp. Range:-40℃~+ 105℃  
 Torque:0.5Nm(4.5Lb.in)

Order Information

ERYBY5-A-7.62-XXP-B  
 B:without Ears  
 No.:of Pole  
 Pitch 7.62mm  
 Pin Type:  
 Barrier Terminal Block without Cover

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:----	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Barrier TERM BLOCK 7.62MM  
 ERYBY5A-7.62-XXP-B