



SECTION A-A

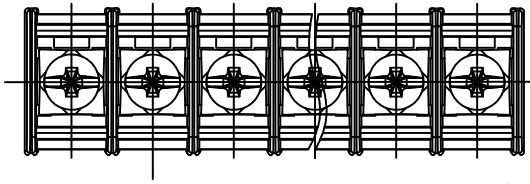

Material
 Screw:M3.0,Steel, Ni Plated
 Pin header:Brass,08t, Tin Plated
 Housing:PA66,UL94 V-0,Black
 Electrical
 Rated voltage: 300V
 Rated current:15A
 Wire range:22~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min
 Mechanical
 Temp. Range:-40℃~+ 105℃
 Torque:0.5Nm(4.5Lb.in)

Order Information

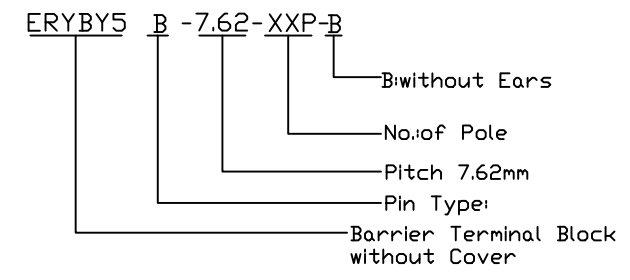

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

Pluggable Terminal Block 5.08MM

THIRD ANGLE PROJECTION

ERYBY5B-7.62-XXP-B