

Material

Housing: PA66, UL94V-0

Clamp: Phosphor Bronze, Tin plated

Wire guard: Stainless steel

Electrical

Rated voltage: 300V

Rated current: 8A

Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Wire range: 28~16AWG 1.5mm²

Mechanical

Temp. Range: -40°C~+105°C

Strip length: 7~8mm

Torque: 0.4 N.m (3.6bin)

Order Information

ERYBYDGKD-3.50-XXP-4 00

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Code: Product Code: 00~99

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Pluggable Terminal Block 3.50mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

ERYBYDGKD-3.50-XXP-4


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4





5

6

7

8

9

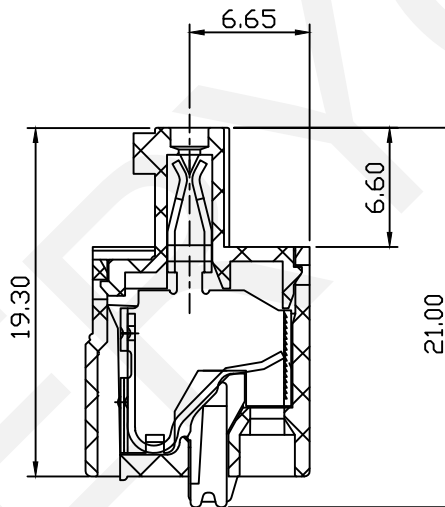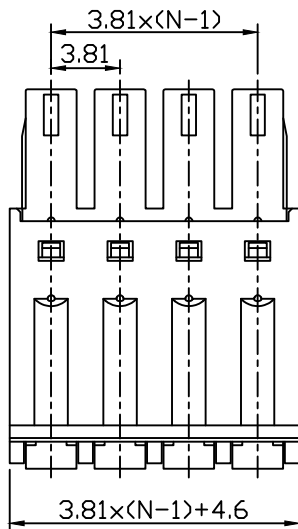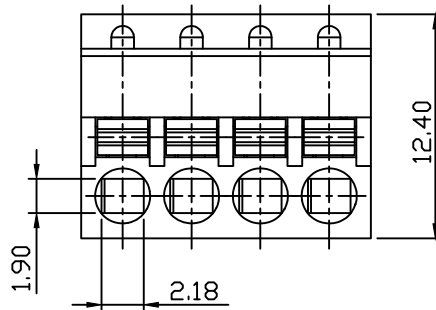

Material

Housing: PA66, UL94V-0

Clamp: Phosphor Bronze, Tin plated

Wire guard: Stainless steel

Electrical

Rated voltage: 300V

Rated current: 8A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Wire range: 28~16AWG 1.5mm²

Mechanical

Temp. Range: -40°C~+105°C

Strip length: 7~8mm

Torque: 0.4 N.m (3.6bin)

Order Information

ERYBYDGKD-3.81-XXP-4 00

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Code: Product Code: 00~99

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Pluggable Terminal Block 3.81mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



ERYBYDGKD-3.81-XXP-4

1

2

3

4

5

6

7

8

9