

Material

Housing:PA66, UL94V-0

Cage:Brass,Ni plated

Clamp:Phosphor bronze, Ni plated

Screws:M3.0,Steel,Zn plated

Electrical

Rated voltage:300V

Rated current:15A

Contact Resistance:20mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Wire Range:28~14AWG1.5mm²

Mechanical

Temp. Range:-40℃+105℃

Strip length:7~8mm

Torque:0.5Nm(4.5Lbin)

Order Information

ERYBYDKBM-5.00-XXP-4 S 00

Terminal Block

Pitch

No. of Pole

Color:4-Green

Screw:S-Slot Screw C-Cross Screw

Product Code: 00~99

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pluggable Terminal Block 5.00MM

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



ERYBYEDBM-5.00-XXP-4S-00

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

1

2

3

4



5

6



7

8

9

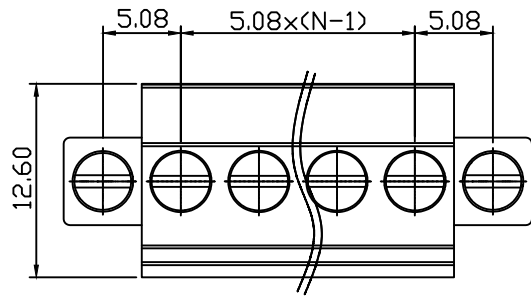

Material
 Housing:PA66, UL94V-0
 Cage:Brass,Ni plated
 Clamp:Phosphor bronze, Ni plated
 Screws:M3.0, Steel,Zn plated
 Electrical
 Rated voltage:300V
 Rated current:15A
 Contact Resistance:20mΩ
 Insulation resistance:500MΩ/DC500V
 Withstand voltage:AC2000V/1min
 Wire Range:28~14AWG1.5mm²
 Mechanical
 Temp. Range:-40℃+105℃
 Strip length:7~8mm
 Torque:0.5Nm(4.5Lbin)

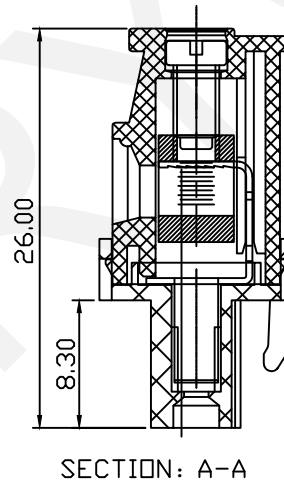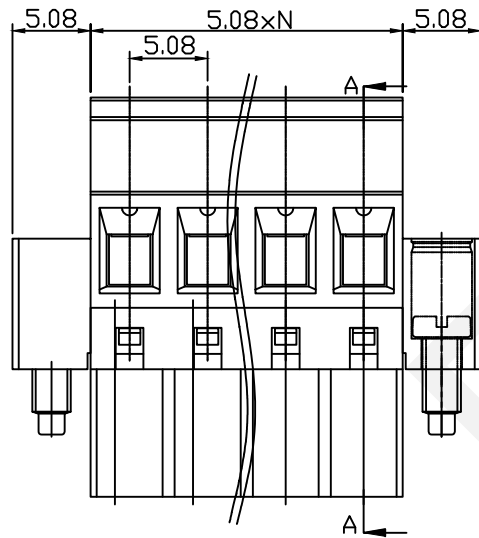

Order Information

ERYBYDKBM-5.08-XXP-4 S 00

Terminal Block _____
 Pitch _____
 No. of Pole _____
 Color:4-Green _____
 Screw:S-Slot Screw C-Cross Screw _____
 Product Code: 00~99 _____

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
 CHK'D BY FENG
 APPR BY ZHAN

Pluggable Terminal Block 5.08MM

THIRD ANGLE PROJECTION

ERYBYEDBM-5.08-XXP-4S-00