

SECTION A-A

Material

Screw:M3.5,Steel, Ni Plated

Pin header:Brass, Tin Plated

Housing:PA66,UL94 V-0,Black

Electrical

Rated voltage: 300V

Rated current:20A

Wire range:22~12AWG 2.5mm²

Contact Resistance: 20 mΩ

Insulation resistance:500MΩ/DC500V

Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40℃~+ 105℃

Torque:0.8Nm(7.0Lb.in)


Order Information

ERYBYS-9.50A-XXP

No.of Pole

Pitch 9.50mm

Barrier Terminal Block

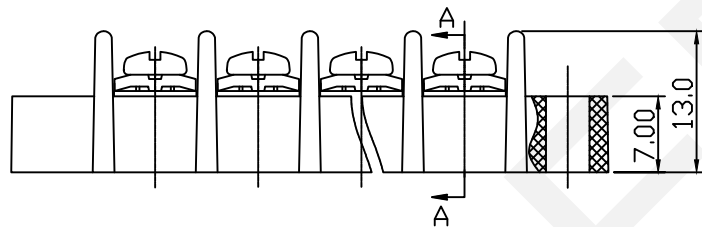

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Barrier TERM BLOCK 9.50MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



ERYBYS-9.50A-XXP

1

2

3

4

5

6

7

8

9