
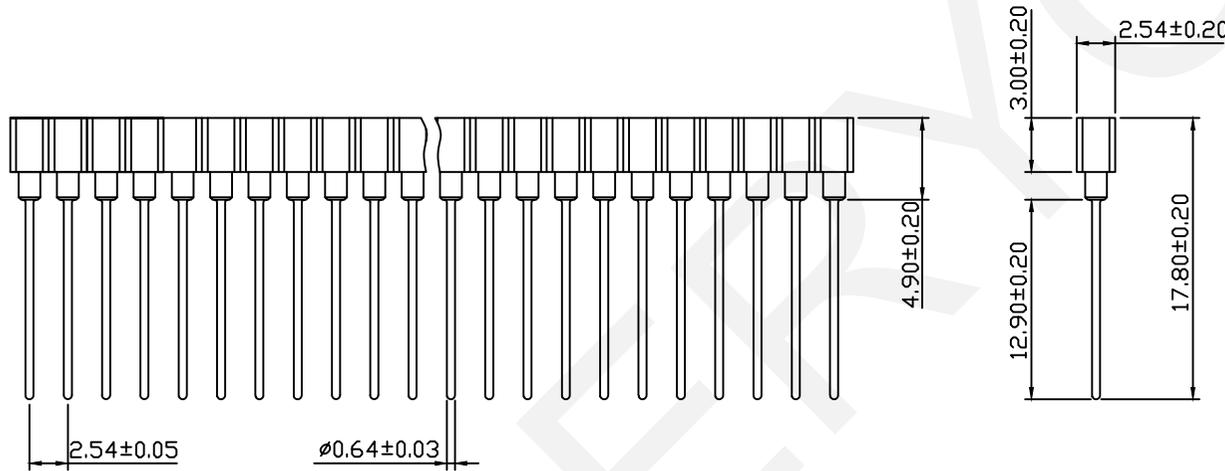


RoHS Compliance

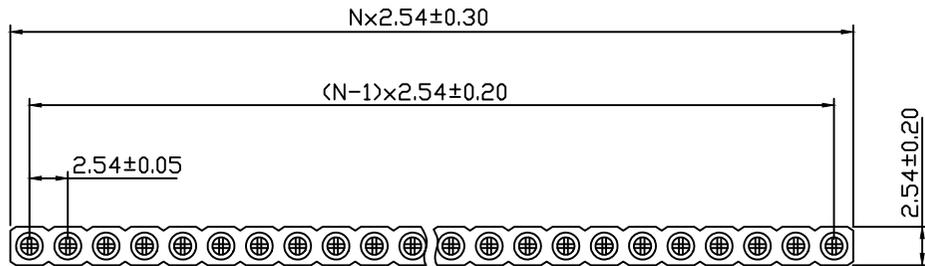

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics:

Current Rating : 3.0AMP

Insulator Resistance: 1000MΩ min. at 100V AC

Contact Resistance: 10mΩ max.

Operating Temperature: -40°C ~ +105°C

Order Information:

ERYAY09E-1-XX-S-Z

IC Socket

ROW

1-Single Layer

2-Double Layer

XX-No. of 01~80 Pins

Straight Pin:

S=17.8mm S2=14.3mm

Material:

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

2.54mm Pitch SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3




±0.5

APPR BY ZHAN



ERYAY09E-1-XX-S-Z

RoHS Compliance

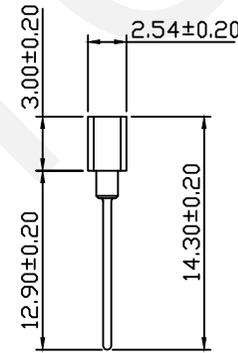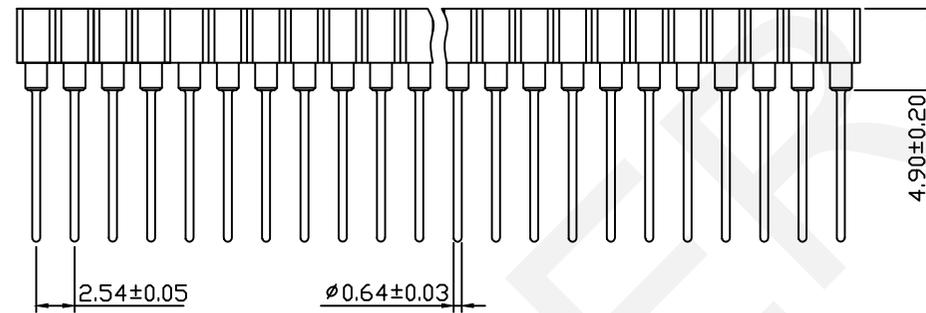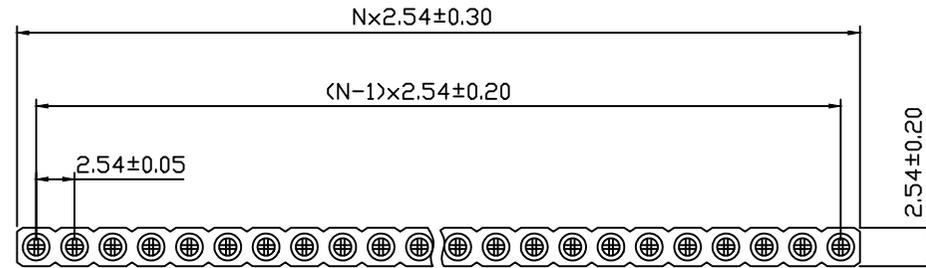

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics:

Current Rating : 3.0AMP

Insulator Resistance: 1000MΩ min. at 100V AC

Contact Resistance: 10mΩ max.

Operating Temperature: -40°C ~ +105°C

Order Information:

ERYAY09E-1-XX-S2-Z

IC Socket

ROW

1-Single Layer

2-Double Layer

XX-No. of 01~80 Pins

Straight Pin:

S=17.8mm S2=14.3mm

Material:

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm Pitch SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3



±0.5

APPR BY ZHAN



ERYAY09E-1-XX-S2-Z

RoHS Compliance

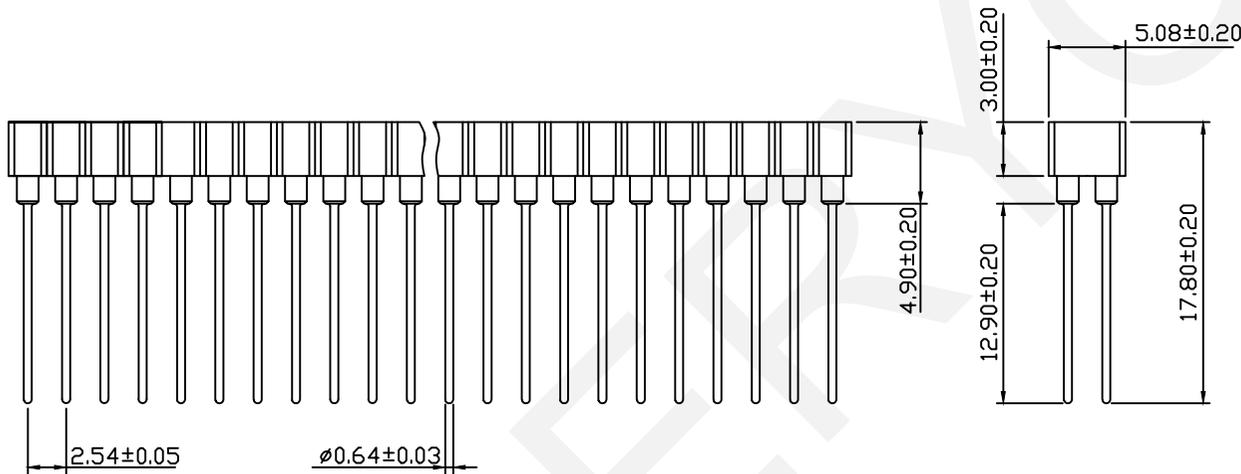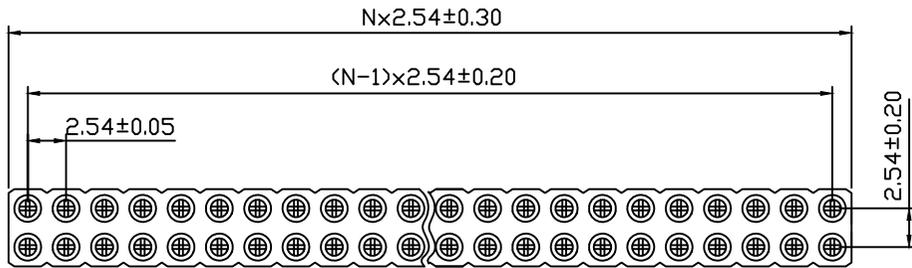

Material:

Housing:30% Glass Filled PPS UL94V-0

Contacts:Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics:

Current Rating :3.0AMP

Insulator Resistance:1000MΩ min.at 100V AC

Contact Resistance:10mΩ max.

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY09E-2-XX-S-Z

IC Socket

ROW

1-Single Layer

2-Double Layer

XX-No.of 01~80 Pins

Straight Pin:

S=17.8mm S2=14.3mm

Material:

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	




2.54mm Pitch SIP Socket Connector

THIRD ANGLE PROJECTION



ERYAY09E-2-XX-S-Z

RoHS Compliance

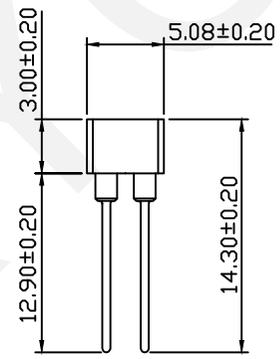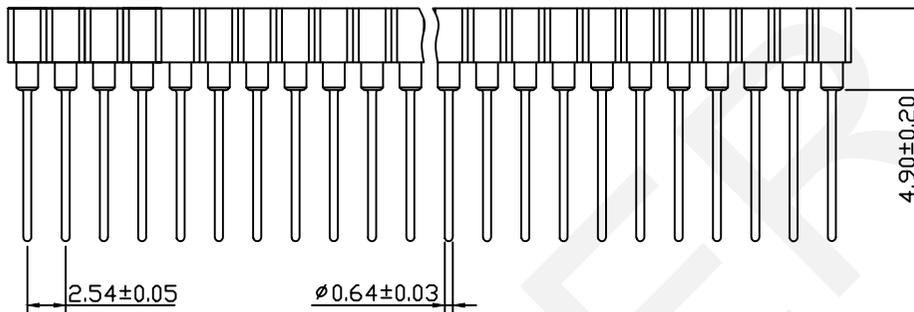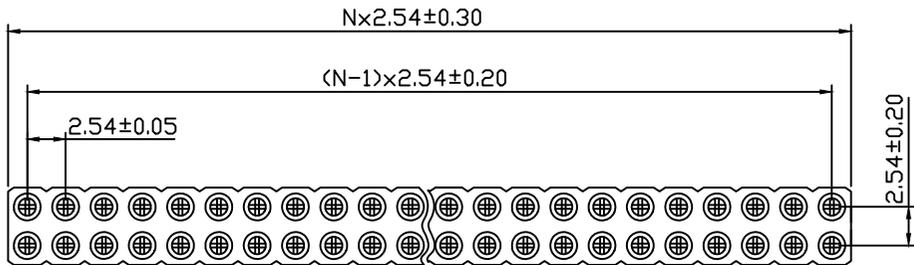

Material:

Housing: 30% Glass Filled PPS UL94V-0

Contacts: Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics:

Current Rating : 3.0AMP

Insulator Resistance: 1000MΩ min. at 100V AC

Contact Resistance: 10mΩ max.

Operating Temperature: -40°C ~ +105°C

Order Information:

ERYAY09E-2-XX-S2-Z

IC Socket

ROW

1-Single Layer

2-Double Layer

XX-No. of 01~80 Pins

Straight Pin:

S=17.8mm S2=14.3mm

Material:

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

2.54mm Pitch SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



ERYAY09E-2-XX-S2-Z

1

2

3

4

5




6

7

8

9

RoHS Compliance

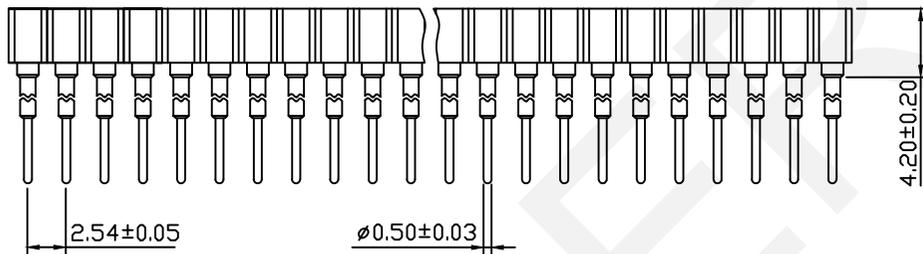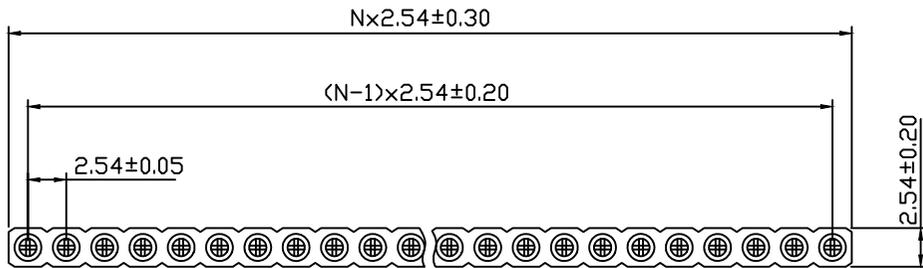

Material:

Housing:30% Glass Filled PPS UL94V-0

Contacts:Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics:

Current Rating :3.0AMP

Insulator Resistance:1000MΩ min.at 100V AC

Contact Resistance:10mΩ max.

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY09EA-1-XX-S1-Y

IC Socket

ROW

1-Single Layer

2-Double Layer

XX-No.of 01~80 Pins

Straight Pin:S1=9.2mm

S2=10.2mm S3=11.2mm S4=12.2mm

S5=13.2mm S6=14.2mm S7=14.2mm

Material:

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.54mm Pitch SIP Socket Connector

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

ERYAY09EA-1-XX-S1-Y

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5




6

7

8

9

RoHS Compliance

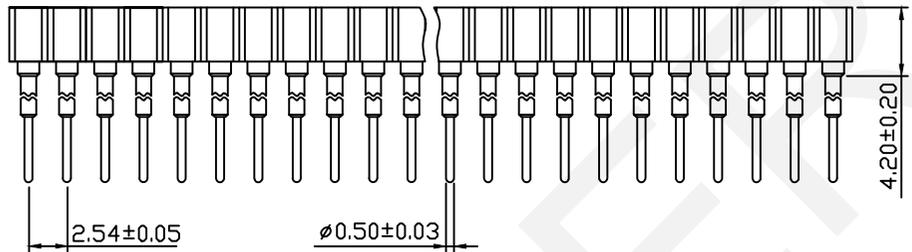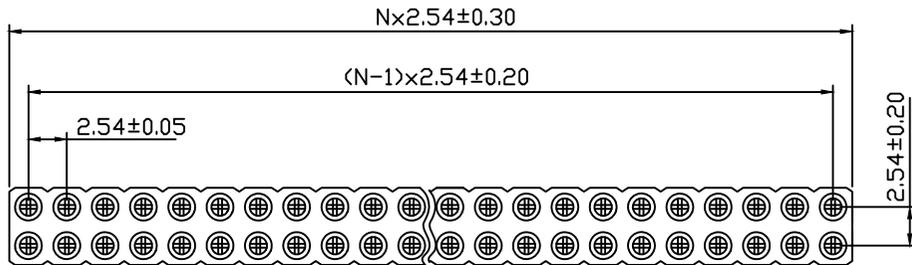

Material:

Housing:30% Glass Filled PPS UL94V-0

Contacts:Beryllium Copper Or Phosphor Bronze

Plating: Gold 1.25u" Over 50u" Nickel

Electrical Characteristics:

Current Rating :3.0AMP

Insulator Resistance:1000MΩ min.at 100V AC

Contact Resistance:10mΩ max.

Operating Temperature:-40°C~+105°C

Order Information:

ERYAY09EA-2-XX-S1-Y

IC Socket

ROW

1-Single Layer

2-Double Layer

XX-No.of 01~80 Pins

Straight Pin:S1=9.2mm

S2=10.2mm S3=11.2mm S4=12.2mm

S5=13.2mm S6=14.2mm S7=14.2mm

Material:

Y-Imported Beryllium Copper

Z-Domestic Phosphor Bronze

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

2.54mm Pitch SIP Socket Connector

THIRD ANGLE PROJECTION



ERYAY09EA-2-XX-S1-Y