


Circuit Diagram





Material:


- 1.Cover:Polycarbonate
- 2.Housing:PA66
- 3.Spring:Carbon Cable Steel Wire
- 4.Contacts:PDM
- 5.Reed
- 6.Crochet Hook

Specification:

- Rating: 0.1A 30V DC
- Contact Resistance:0.03Ω Max
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: AC 250V(50Hz) Min
- Mechanical Life: 100000 Cycles
- Electrical Life: 50000 Cycles
- Operating Force:160±80g

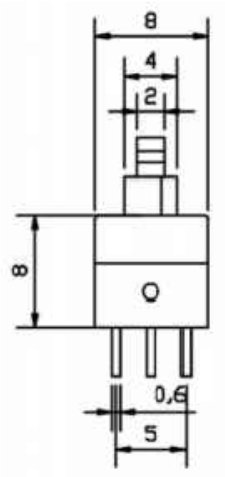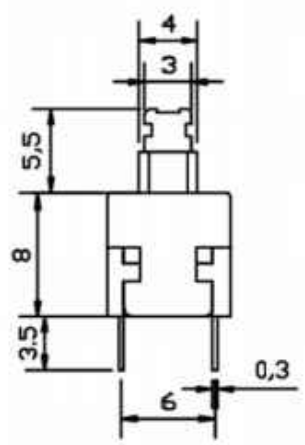

Hole Dimensions

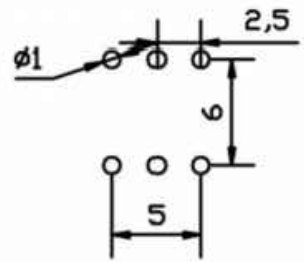

Order Information:


ERYGY8.0x8.0-X

Mini Push Switch

8.0x8.0mm

Function:

0=Non Lock Type 1=With Lock Type



NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

Mini Push Switch 8.0x8.0mm

THIRD ANGLE PROJECTION

ERYGY8.0X8.0