



ELECTRICAL
 Rating :DC30V 0.3A , DC1.6V 0.5A
 Insulation Resistance :>100MΩ DC250V
 Withstand Voltage :AC 250V 1 Minute
 Contact Resistance :<50mΩ
 Soldering Temper :250°C Max.3sec
 Mechanical Life :100,000 Cycles
 Electrical Life :10,000 Cycles
 Ambient Temper.Used :-25°C to +65°C
 Ambient Humidity Used :<85% RH
 Operating Force :200±80 gf

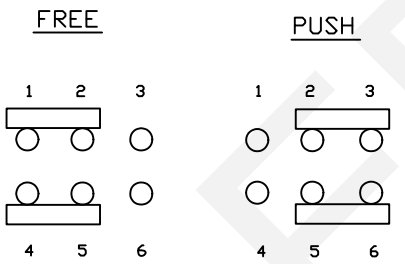

ORDER INFORMATION
 Product NO.: ERYGY8.5x8.5B X

Standard Vertical
 Push Switch Series
 0=Non Lock 1=Lock

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Standard Vertical Push Switch Series
 THIRD ANGLE PROJECTION

 ERYGY8.5X8.5