

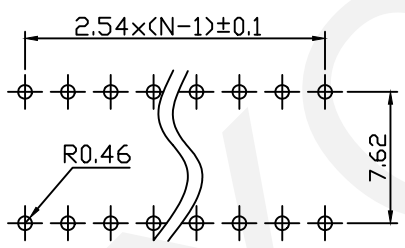


Switching Characteristics:  
 Mechanical Life: 2000 Operations Per Switch  
 Operation Force: ≤9.8N Max.  
 Stroke: 2.0mm  
 Operation Temp: -20°C~+70°C  
 Electrical Life: 2000 Operations Per Switch-24 VDC 25mA  
 Contact Resistance: 50m Max. At Initial  
 Non-Switching Rating: 100mA, 50VDC  
 Switching Rating: 25mA, 24VDC  
 Circuit: Single Pole Single Throw  
 Contact: Half Gold/Sn

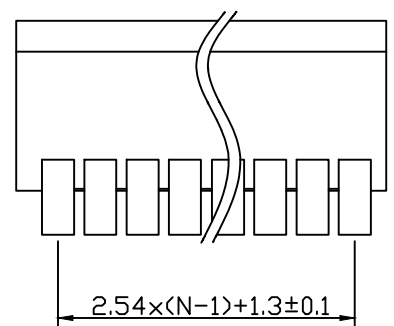

PCB Layout

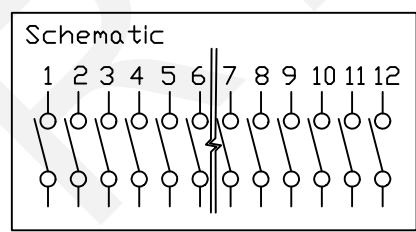

| Model No.  | No.Pos | A     |
|------------|--------|-------|
| ERYGYPT-01 | 1      | 4.10  |
| ERYGYPT-02 | 2      | 6.64  |
| ERYGYPT-03 | 3      | 9.18  |
| ERYGYPT-04 | 4      | 11.72 |
| ERYGYPT-05 | 5      | 14.26 |
| ERYGYPT-06 | 6      | 16.80 |
| ERYGYPT-07 | 7      | 19.34 |
| ERYGYPT-08 | 8      | 21.88 |
| ERYGYPT-09 | 9      | 24.42 |
| ERYGYPT-10 | 10     | 26.96 |
| ERYGYPT-12 | 12     | 32.04 |

Order Information  
 ERYGYPT-XX-X-X-X  
 Dip Switch  
 Number of Pos.: 01~12Pos.  
 Color: R=Red, B=Blue, N=Black  
 0: Non-Sealed 1: With Sealed  
 Packaging: 0=Tube 1=Tape

Soldering And Cleaning Processes Keep All Switch Contacts In Their "OFF" Position For All Operations

NINGBO ERYCO ELECTRONIC CO.,LTD

|          |                |       |        |               |             |
|----------|----------------|-------|--------|---------------|-------------|
| UNITS:mm | SHEET SIZE: A4 |       |        | SCALE:---     | DRWN BY PAN |
| 0~3      | 3~18           | 18~50 | 50~120 | CHK'D BY FENG |             |
| ±0.12    | ±0.15          | ±0.3  | ±0.5   | APPR BY ZHAN  |             |

Dip Switch Pitch 2.54mm,  
 Bulge Handle Type, RoHS  
 THIRD ANGLE PROJECTION  
 ERYGYPT