
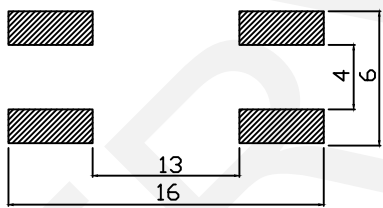


H1=4.3mm
H2=5.0mm
H3=7.0mm
H4=7.5mm

ELECTRICAL

1. Rating: 50mA 12VDC
2. Contact Resistance : 50mΩ max (Initial)
3. Insulation Resistance: 100MΩ (min DC 250V)
4. Dielectric Strength: AC250V (50/60Hz For 1minute)
5. Electrically Life: 100000 Cycles
6. Environment Temperature: -20℃~+70℃
7. Operating Force: 180/250(±30gf)
8. Seal Temperature: 260℃~280℃

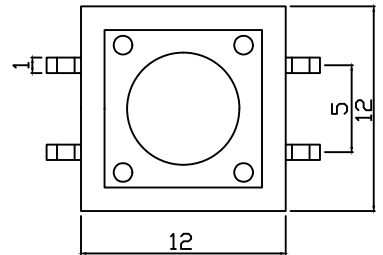

PCB LAYOUT

ORDER INFORMATION

ERYGYS1201-H1-180-B

Part Number

Height: H1=4.3mm H2=5.0mm

H3=7.0mm H4=7.5mm

Operating Force : 180~250gf


Packing: B=Bulk T=Tape

NINGBO ERYCO ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

12x12 Tact Switch Series

THIRD ANGLE PROJECTION



ERYGYS1201