


ELECTRICAL

- 1.Rating:50mA 12VDC
- 2.Contact Resistance :50mΩ max(Initial)
- 3.Insulation Resistance:100MΩminDC 250V)
- 4.Dielectric Strength:AC250V(50/60Hz For 1minute)
- 5.Electrically Life:100000 Cycles
- 6.Environment Temperature:-20℃~+70℃
- 7.Operating Force: 180/250(±30gf)
- 8.Seal Temperature:260℃~280℃

ORDER INFORMATION

ERYGYS4502-H1-180-B

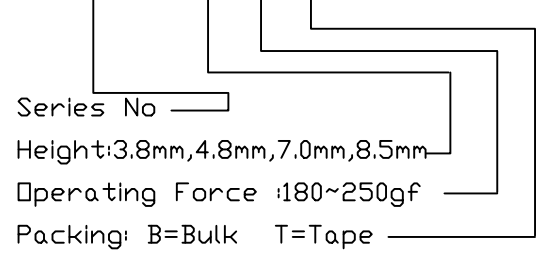

PCB LAYOUT

G	NINGBO ERYCO ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	4.5x4.5mm Tact Switch Series	
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	ERYGYS4502
1	2	3	4	5	6	7	8	9	